


NV001 LIGHTING FIXTURE WITH MOTION SENSOR




- Detection from every angle with 360° motion sensor.
- Soft light with Soft Glass
- Adjustable time and lux
- Easy ceiling installation

| Power             | Rated Load    | Detection Range | Detection Height | Time - Delay   | Ambient Light | Working Temperature | Protection      | Box Info                 |
|-------------------|---------------|-----------------|------------------|----------------|---------------|---------------------|-----------------|--------------------------|
| 230-240V~ 50/60Hz | 2 x 25W - E27 | 360°<br>Max. 9m | Max. 2.8m        | 10 Sec - 5 Min | 2-2000 lux    | -20°C ~ +40°C       | IP20<br>Class I | 10 Pcs<br>540 x 600 x 31 |



EMERGENCY  
LIGHTING



- Detection from every angle with 360° motion sensor.
- Soft light with Soft Glass
- Adjustable time and lux
- Easy ceiling installation
- Emergency lighting when power off
- 3x1000mAh Ni-Mh Battery
- 5 Hours emergency light duration


- Emergency Lighting mode 360 Lumen

| Power            | Rated Load | Emergency Lumen     | Detection Range | Detection Height | Time - Delay   | Ambient Light | Working Temperature | Protection       | Box Info             |
|------------------|------------|---------------------|-----------------|------------------|----------------|---------------|---------------------|------------------|----------------------|
| 230-240V~50/60Hz | 2x25W- E27 | <b>LM</b><br>360 LM | 360°<br>Max 9m  | Max 2.8m         | 10 Sec - 5 Min | 2-2000 lux    | -20°C - +40°C       | IP 20<br>Class I | 10 Pcs<br>540x600x31 |



**NV003.20 18W LED SLIM LIGHTING FIXTURE WITH MOTION SENSOR**

PC COVER



- Low power consumption
- Soft light with Soft Glass
- Adjustable time and lux
- Easy ceiling installation
- Detection from every angle with 360° motion sensor.


- 2800-3100K
- 4000-4500K
- 6000-6500K

• 1440 Lumen

| Power             | Luminous Flux | Detection Range | Detection Height | Time - Delay   | Ambient Light | Working Temperature | Protection      | Box Info                 |
|-------------------|---------------|-----------------|------------------|----------------|---------------|---------------------|-----------------|--------------------------|
| 230-242V~ 50/60Hz | 1440 LM       | Max 9m          | Max 2.8m         | 10 Sec - 5 Min | 2-2000 lux    | -20°C - +40°C       | IP20<br>Class I | 10 Pcs<br>540 x 610 x 31 |



PC COVER



- Detection from every angle with 360° motion sensor.
- Soft light with Soft Glass
- Adjustable time and lux
- Easy ceiling installation
- Emergency lighting when power
- 3x1000mAh Ni-Mh Battery
- 5 Hours emergency light duration


- 2800-3100K
- 4000-4500K
- 6000-6500K
- 1440 Lumen
- Emergency Lighting mode 360 Lumen

| Power             | Luminous Flux | Emergency | Detection Range | Detection Height | Time - Delay   | Ambient Light | Working Temperature | Protection       | Box Info                 |
|-------------------|---------------|-----------|-----------------|------------------|----------------|---------------|---------------------|------------------|--------------------------|
| 230-240V~ 50/60Hz | 1440 LM       | 360 LM    | Max. 9m         | Max. 2.8m        | 10 Sec - 5 Min | 2-2000 lux    | -30°C - +40°C       | IP 20<br>Class I | 10 Pcs<br>540 x 610 x 33 |



**NV003.33 18W LED SLIM LIGHTING FIXTURE WITH MOTION SENSOR**

PC COVER  
PC BODY



- Low power consumption
- Soft light with Soft PC Glass
- Adjustable time and lux
- Easy ceiling installation
- Detection from every angle with 360° motion sensor.


- 2800-3100K
- 4000-4500K
- 6000-6500K

• 1440 Lumen

| Power             | Luminous Flux | Detection Range | Detection Height | Time - Delay   | Ambient Light | Working Temperature | Protection      | Box Info                 |
|-------------------|---------------|-----------------|------------------|----------------|---------------|---------------------|-----------------|--------------------------|
| 230-242V~ 50/60Hz | 1440 LM       | Max 9m          | Max 2.8m         | 10 Sec - 5 Min | 2-2000 lux    | -20°C - +40°C       | IP20<br>Class I | 10 Pcs<br>540 x 610 x 31 |



PC COVER  
PC BODY



- Detection from every angle with 360° motion sensor.
- Soft light with Soft PC Glass
- Adjustable time and lux
- Easy ceiling installation
- Emergency lighting when power
- 3x1000mAh Ni-Mh Battery
- 5 Hours emergency light duration


- 2800-3100K
- 4000-4500K
- 6000-6500K
- 1440 Lumen
- Emergency Lighting mode 360 Lumen

|                   |                                   |                               |                            |                             |                         |                          |                                |                                   |                      |
|-------------------|-----------------------------------|-------------------------------|----------------------------|-----------------------------|-------------------------|--------------------------|--------------------------------|-----------------------------------|----------------------|
| <b>Power</b><br>  | <b>Luminous Flux</b><br><b>LM</b> | <b>Emergency</b><br><b>LM</b> | <b>Detection Range</b><br> | <b>Detection Height</b><br> | <b>Time - Delay</b><br> | <b>Ambient Light</b><br> | <b>Working Temperature</b><br> | <b>Protection</b><br><b>IP 20</b> | <b>Box Info</b><br>  |
| 230-240V~ 50/60Hz | 1440 LM                           | 360 LM                        | Max. 9m                    | Max. 2.8m                   | 10 Sec - 5 Min          | 2-2000 lux               | -30°C - +40°C                  | Class I                           | 10 Pcs<br>540x610x33 |



**NV003.10** 18W LED SLIM LIGHTING FIXTURE WITH MOTION SENSOR

PC COVER



- Low power consumption
- Soft light with Soft Glass
- Adjustable time and lux
- Easy ceiling installation
- Detection from every angle with 360° motion sensor.


- 2800-3100K
- 4000-4500K
- 6000-6500K

• 1440 Lumen

| Power             | Luminous Flux | Detection Range | Detection Height | Time - Delay   | Ambient Light | Working Temperature | Protection      | Box Info                 |
|-------------------|---------------|-----------------|------------------|----------------|---------------|---------------------|-----------------|--------------------------|
| 230-240V~ 50/60Hz | 1440 LM       | Max 9m          | Max 2.8 m        | 10 Sec - 5 Min | 2-2000 lux    | -20°C - +40°C       | IP20<br>Class I | 10 Pcs<br>640 x 610 x 31 |



PC COVER



- Detection from every angle with 360° motion sensor.
- Soft light with Soft Glass
- Adjustable time and lux
- Easy ceiling installation
- Emergency lighting when power
- 3x1000mAh Ni-Mh Battery
- 5 Hours emergency light duration


- 2800-3100K
- 4000-4500K
- 6000-6500K
- 1440 Lumen
- Emergency Lighting mode 360 Lumen

|                   |                                   |                               |                            |                             |                         |                          |                                |                                   |                      |
|-------------------|-----------------------------------|-------------------------------|----------------------------|-----------------------------|-------------------------|--------------------------|--------------------------------|-----------------------------------|----------------------|
| <b>Power</b><br>  | <b>Luminous Flux</b><br><b>LM</b> | <b>Emergency</b><br><b>LM</b> | <b>Detection Range</b><br> | <b>Detection Height</b><br> | <b>Time - Delay</b><br> | <b>Ambient Light</b><br> | <b>Working Temperature</b><br> | <b>Protection</b><br><b>IP 20</b> | <b>Box Info</b><br>  |
| 230-240V~ 50/60Hz | 1440 LM                           | 360 LM                        | Max. 9m ↔                  | Max. 2.8m                   | 10 Sec - 5 Min          | 2-2000 lux               | -30°C - +40°C                  | Class I                           | 10 Pcs<br>540x610x33 |





WHITE BODY



- Low power consumption
- Soft light with Soft Glass
- Adjustable time and lux
- Easy ceiling installation
- Detection from every angle
- 360° motion sensor.


- 2800-3100K
- 4000-4500K
- 6000-6500K

• 1440 Lumen

| Power              | Rated Load    | Detection Range | Detection Height | Time - Delay    | Ambient Light | Working Temperature | Protection       | Box Info                 |
|--------------------|---------------|-----------------|------------------|-----------------|---------------|---------------------|------------------|--------------------------|
| 230-240V - 50/60Hz | 800 W / 400 W | 3 - 10 m        | 1.5 - 3.5 m      | 10 Sec - 15 Min | 10-2000 lux   | -20°C - +40°C       | IP20<br>Class II | 10 Pcs<br>640 x 610 x 31 |



CHROME BODY



- Low power consumption
- Soft light with Soft Glass
- Adjustable time and lux
- Easy ceiling installation
- Detection from every angle with 360° motion sensor.


- 2800-3100K
- 4000-4500K
- 6000-6500K
- 1440 Lumen

| Power             | Rated Load    | Detection Range | Detection Height | Time - Delay    | Ambient Light | Working Temperature | Protection        | Box Info                 |
|-------------------|---------------|-----------------|------------------|-----------------|---------------|---------------------|-------------------|--------------------------|
| 230-240V~ 50/60Hz | 800 W / 400 W | 3 - 10 m        | 1,5 - 3,5 m      | 10 Sec - 15 Min | 10-2000 lux   | -20°C - +40°C       | IP 20<br>Class II | 10 Pcs<br>540 x 610 x 31 |



**NV003.51** 18W LED SLIM LIGHTING FIXTURE WITH MICROWAVE MOTION SENSOR

MATT CHROME BODY



- Low power consumption
- Soft light with Soft Glass
- Adjustable time and lux
- Easy ceiling installation
- Detection from every angle w 360° motion sensor.

- 2800-3100K
- 4000-4500K
- 6000-6500K

• 1440 Lumen


| Power             | Rated Load    | Detection Range | Detection Height | Time - Delay    | Ambient Light | Working Temperature | Protection       | Box Info                 |
|-------------------|---------------|-----------------|------------------|-----------------|---------------|---------------------|------------------|--------------------------|
| 230-240V~ 50/60Hz | 800 W / 400 W | 3 - 10 m        | 1,5 - 3,5 m      | 10 Sec - 15 Min | 10-2000 lux   | -20°C - +40°C       | IP20<br>Class II | 10 Pcs<br>640 x 610 x 31 |



## NV011 MOTION SENSOR



- 360° Detection range
- Easy ceiling mount installation
- Adjustable time and lux settings




| Voltage           | Rated Load   | Detection Range  | Detection Height | Time Settings  | Luminous Flux | Working Temperature | Protection       | Box info                  |
|-------------------|--------------|------------------|------------------|----------------|---------------|---------------------|------------------|---------------------------|
| 230-240V~ 50/60Hz | 800 W/ 400 W | 360°<br>Max. 6 m | 2.2 - 4 m        | 10 Sec - 7 Min | 30-2000 lux   | -20°C - +40°C       | IP20<br>Class II | 100 Pcs<br>540 x 610 x 31 |



## NV012 MOTION SENSOR



- 360° Detection range
- Easy ceiling mount installation
- Adjustable time and lux settings




| Voltage           | Rated Load     | Detection Range  | Detection Height | Time Settings   | Luminous Flux | Hole cut | Working Temperature | Protection       | Box info                  |
|-------------------|----------------|------------------|------------------|-----------------|---------------|----------|---------------------|------------------|---------------------------|
| 230-240V~ 50/60Hz | 1200 W / 400 W | 360°<br>Max. 6 m | 2.2 - 4 m        | 10 Sec - 15 Min | 30-2000 lux   | Ø70 mm   | -20°C - +40°C       | IP20<br>Class II | 100 Pcs<br>540 x 610 x 31 |



## NV013 MICROWAVE SENSOR



- 360° Detection range
- Easy ceiling mount installation
- Adjustable time and lux settings
- Detection behind wall and window




| Voltage           | Rated Load     | Detection Range  | Detection Height | Time Settings  | Luminous Flux | Working Temperature | Protection        | Box Info                  |
|-------------------|----------------|------------------|------------------|----------------|---------------|---------------------|-------------------|---------------------------|
| 230-240V~ 50/60Hz | 2000 W / 400 W | 360°<br>Max. 8 m | 1.5 - 3.5 m      | 8 Sec ~ 12 Min | 3-30-3000 lux | -20°C ~ +40°C       | IP 20<br>Class II | 100 Pcs<br>540 x 600 x 31 |



## NV014 MICROWAVE SENSOR



- 360° Detection range
- Easy flush mount installation
- Adjustable time and lux settings
- Detection behind wall and window




| Voltage           | Rated Load     | Detection Range  | Detection Height | Time Settings   | Luminous Flux | Hole cut | Working Temperature | Protection        | Box Info                  |
|-------------------|----------------|------------------|------------------|-----------------|---------------|----------|---------------------|-------------------|---------------------------|
| 230-240V~ 50/60Hz | 1200 W / 200 W | 360°<br>Max. 8 m | 1.5 - 3.5 m      | 10 Sec ~ 15 Min | 3-2000 lux    | Ø70 mm   | -20°C ~ +40°C       | IP 20<br>Class II | 100 Pcs<br>540 x 610 x 31 |



## NV015 PIR MOTION SENSOR



- 360° Detection range
- Easy ceiling mount installation
- Adjustable time and lux settings




| Voltage           | Rated Load   | Detection Range | Detection Height | Time Settings  | Luminous Flux | Working Temperature | Protection       | Box info                  |
|-------------------|--------------|-----------------|------------------|----------------|---------------|---------------------|------------------|---------------------------|
| 230-240V~ 50/60Hz | 800 W/ 400 W | 360°<br>Max 6 m | 2.2 - 4 m        | 10 Sec ~ 7 Min | 10,000 lux    | -20°C ~ +40°C       | IP20<br>Class II | 100 Pcs<br>540 x 650 x 31 |



## NV016 PIR MOTION SENSOR




- 360° Detection range
- Easy flush mount installation
- Adjustable time and lux settings
- Detection behind wall and window




| Voltage           | Rated Load     | Detection Range | Detection Height | Time Settings  | Luminous Flux | Hole cut | Working Temperature | Protection       | Box info                  |
|-------------------|----------------|-----------------|------------------|----------------|---------------|----------|---------------------|------------------|---------------------------|
| 230-240V~ 50/60Hz | 2000 W/ 1000 W | 360°<br>2-20 m  | 2.2 - 4 m        | 10 Sec ~ 7 Min | 30,000 lux    | Ø80 mm   | -20°C ~ +40°C       | IP20<br>Class II | 100 Pcs<br>540 x 650 x 31 |



## NV017 MINI SENSOR

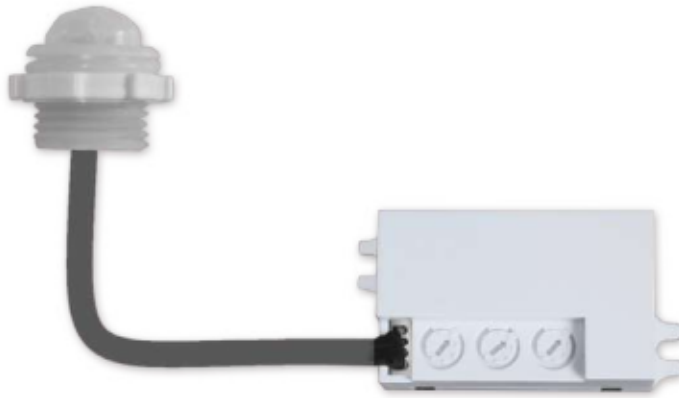

- 360° Detection range
- Easy ceiling mount installation
- Adjustable time and lux settings
- Detection behind wall and window




| Voltage           | Rated Load | Detection Range | Detection Height | Time Settings  | Luminous Flux | Working Temperature | Protection        | Box Info                    |
|-------------------|------------|-----------------|------------------|----------------|---------------|---------------------|-------------------|-----------------------------|
| 230-240V~ 50/60Hz | 100 W      | 360°            | 1.8 - 2.5m       | 10 Sec - 7 Min | 10-2000 lux   | -20°C - +40°C       | IP 20<br>Class II | 100 Pcs<br>430 x 270 x 27.5 |



## NV018 MICROWAVE SENSOR



- 360° Detection range
- Easy flush mount installation
- Adjustable time and lux settings
- Detection behind wall and window




| Voltage           | Rated Load     | Detection Range | Detection Height | Time Settings   | Luminous Flux | Working Temperature | Protection        | Box Info                    |
|-------------------|----------------|-----------------|------------------|-----------------|---------------|---------------------|-------------------|-----------------------------|
| 230-240V~ 50/60Hz | 1200 W / 300 W | 360°            | 1.5 - 3.5 m      | 10 Sec - 15 Min | 3-2000 lux    | -20°C - +40°C       | IP 20<br>Class II | 100 Pcs<br>310 x 330 x 30.0 |



## NV019 MICROWAVE MOTION SENSOR



- 360° Detection range
- Easy flush mount installation
- Adjustable time and lux settings
- Detection behind wall and window




| Voltage            | Rated Load     | Detection Range  | Detection Height | Time Settings   | Luminous Flux | Working Temperature | Protection       | Box info             |
|--------------------|----------------|------------------|------------------|-----------------|---------------|---------------------|------------------|----------------------|
| 230-240V - 50/60Hz | 1200 W / 300 W | 360°<br>2 - 10 m | 1,5 - 3,5 m      | 10 Sec ~ 30 Min | 10-2000 lux   | -20°C ~ +40°C       | IP20<br>Class II | 50 Pcs<br>540x610x30 |



## NV020 PIR MOTION SENSOR



- 180° Detection range
- Easy flush mount installation
- Adjustable time and lux settings
- Detection behind wall and window



| Voltage            | Rated Load     | Detection Range | Detection Height | Time Settings  | Luminous Flux | Working Temperature | Protection       | Box info                  |
|--------------------|----------------|-----------------|------------------|----------------|---------------|---------------------|------------------|---------------------------|
| 230-240V - 50/60Hz | 1200 W / 300 W | 180°<br>12 m    | 1,5 - 2,5 m      | 10 Sec ~ 7 Min | 30-2000 lux   | -20°C ~ +40°C       | IP20<br>Class II | 50 Pcs<br>475 x 385 x 210 |






## NV021 MOTION SENSOR



- 180° / 360° Detection range
- Adjustable time and lux settings
- Ceiling, wall and corner installation

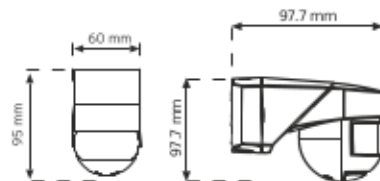

| Voltage           | Rated Load      | Detection Range                | Detection Height | Time Settings   | Luminous Flux | Working Temperature | Protection        | Box Info                   |
|-------------------|-----------------|--------------------------------|------------------|-----------------|---------------|---------------------|-------------------|----------------------------|
| 230-240V~ 50/60Hz | 2000 W / 1000 W | 180° / 360°<br>12 (diameter) m | 1.8 - 2.5 m      | 10 Sec - 10 Min | 10-2000 lux   | -20°C - +40°C       | IP 20<br>Class II | 100 Pcs<br>530 x 440 x 185 |



## NV022 INFRARED MOTION SENSOR



- 2 and 3 Wire Line

| Voltage           | Rated Load    | Detection Range | Detection Height | Time Settings  | Luminous Flux | Working Temperature | Protection        | Box Info                    |
|-------------------|---------------|-----------------|------------------|----------------|---------------|---------------------|-------------------|-----------------------------|
| 230-240V~ 50/60Hz | 500 W / 200 W | 360°<br>Max. 8m | 1 - 8 m          | 10 Sec - 7 Min | 3-2000 lux    | -20°C - +40°C       | IP 20<br>Class II | 100 Pcs<br>475 x 380 x 21.0 |





# LED LIGHTING FIXTURES

## PL003.01 3W LED DOWNLIGHT



Flush Mount




Box

96 Pcs

Ø75 x 360 x 235



- Aluminium Body
- PMMA LGP
- PC/PMMA diffusor
- IP23 Protection
- NO-VO LED Driver



| Code           | V        | W  | Lumen | Kelvin | IP | A   | B    | Cut Hole |
|----------------|----------|----|-------|--------|----|-----|------|----------|
| PL003.01-3000K | 220-265V | 3W | 240   | 3000   | 23 | Ø88 | 18.8 | Ø75      |
| PL003.01-4000K | 220-265V | 3W | 240   | 4000   | 23 | Ø88 | 18.8 | Ø75      |
| PL003.01-6500K | 220-265V | 3W | 240   | 6500   | 23 | Ø88 | 18.8 | Ø75      |

## PL006.01 6W LED DOWNLIGHT



Flush Mount




Box

48 Pcs

Ø115 x 330 x 255



- Aluminium Body
- PMMA LGP
- PC/PMMA diffusor
- IP23 Protection
- NO-VO LED Driver



| Code           | V        | W  | Lumen | Kelvin | IP | A    | B    | Cut Hole |
|----------------|----------|----|-------|--------|----|------|------|----------|
| PL006.01-3000K | 220-265V | 6W | 480   | 3000   | 23 | Ø120 | 18.8 | Ø110     |
| PL006.01-4000K | 220-265V | 6W | 480   | 4000   | 23 | Ø120 | 18.8 | Ø110     |
| PL006.01-6500K | 220-265V | 6W | 480   | 6500   | 23 | Ø120 | 18.8 | Ø110     |

## PL009.01 9W LED DOWNLIGHT



Flush Mount




48 Pcs

600 x 325 x 325



Aluminium Body  
PMMA LGP  
PC/PMMA diffusor  
IP23 Protection  
NO-VO LED Driver



| Code           | V        | W  | Lumen | Kelvin | IP | A    | B    | Cut Hole |
|----------------|----------|----|-------|--------|----|------|------|----------|
| PL009.01-3000K | 220-265V | 9W | 720   | 3000   | 23 | Ø145 | 18.8 | Ø135     |
| PL009.01-4000K | 220-265V | 9W | 720   | 4000   | 23 | Ø145 | 18.8 | Ø135     |
| PL009.01-6500K | 220-265V | 9W | 720   | 6500   | 23 | Ø145 | 18.8 | Ø135     |

## PL012.01 12W LED DOWNLIGHT



Flush Mount




24 Pcs

495 x 365 x 165



Aluminium Body  
PMMA LGP  
PC/PMMA diffusor  
IP23 Protection  
NO-VO LED Driver




| Code           | V        | W   | Lumen | Kelvin | IP | A    | B    | Cut Hole |
|----------------|----------|-----|-------|--------|----|------|------|----------|
| PL012.01-3000K | 220-265V | 12W | 960   | 3000   | 23 | Ø155 | 18.8 | Ø170     |
| PL012.01-4000K | 220-265V | 12W | 960   | 4000   | 23 | Ø155 | 18.8 | Ø170     |
| PL012.01-6500K | 220-265V | 12W | 960   | 6500   | 23 | Ø155 | 18.8 | Ø170     |

## PL015.01 15W LED DOWNLIGHT



- Aluminium Body
- PMMA LGP
- PC/PMMA diffusor
- IP23 Protection
- NO-VO LED Driver




| Code           | V        | W   | Lumen | Kelvin | IP | A    | B  | Cut Hole |
|----------------|----------|-----|-------|--------|----|------|----|----------|
| PL015.01-3000K | 220-265V | 15W | 1200  | 3000   | 23 | Ø200 | 10 | Ø185     |
| PL015.01-4000K | 220-265V | 15W | 1200  | 4000   | 23 | Ø200 | 10 | Ø185     |
| PL015.01-6500K | 220-265V | 15W | 1200  | 6500   | 23 | Ø200 | 10 | Ø185     |

## PL018.01 18W LED DOWNLIGHT



- Aluminium Body
- PMMA LGP
- PC/PMMA diffusor
- IP23 Protection
- NO-VO LED Driver



| Code           | V        | W   | Lumen | Kelvin | IP | A    | B    | Cut Hole |
|----------------|----------|-----|-------|--------|----|------|------|----------|
| PL018.01-3000K | 220-265V | 18W | 1440  | 3000   | 23 | Ø225 | 18.8 | Ø205     |
| PL018.01-4000K | 220-265V | 18W | 1440  | 4000   | 23 | Ø225 | 18.8 | Ø205     |
| PL018.01-6500K | 220-265V | 18W | 1440  | 6500   | 23 | Ø225 | 18.8 | Ø205     |


## SPL018.01 18 W LED DOWNLIGHT



Ceiling Mount



Aluminium Body  
PMMA LGP  
PC/PMMA diffusor  
IP23 Protection  
NO-VO LED Driver



| Code            | V        | W   | Lumen | Kelvin | IP | A     | B  |
|-----------------|----------|-----|-------|--------|----|-------|----|
| SPL012.01-3000K | 220-265V | 18W | 1440  | 3000   | 23 | Ø 225 | 27 |
| SPL012.01-4000K | 220-265V | 18W | 1440  | 4000   | 23 | Ø 225 | 27 |
| SPL012.01-6500K | 220-265V | 18W | 1440  | 6500   | 23 | Ø 225 | 27 |


## SPL024.01 24W LED DOWNLIGHT



Ceiling Mount



Aluminium Body  
PMMA LGP  
PC/PMMA diffusor  
IP23 Protection  
NO-VO LED Driver




| Code            | V        | W   | Lumen | Kelvin | IP | A     | B  |
|-----------------|----------|-----|-------|--------|----|-------|----|
| SPL018.01-3000K | 220-265V | 24W | 1920  | 3000   | 23 | Ø 300 | 27 |
| SPL018.01-4000K | 220-265V | 24W | 1920  | 4000   | 23 | Ø 300 | 27 |
| SPL018.01-6500K | 220-265V | 24W | 1920  | 6500   | 23 | Ø 300 | 27 |



**NO-VO**

Aluminium Body  
 PMMA LGP  
 PC/PMMA diffusor  
 IP23 Protection  
 NO-VO LED Driver

| Code          | V        | W   | Lumen | Kelvin | IP | A   | B  |
|---------------|----------|-----|-------|--------|----|-----|----|
| KSPL018-3000K | 220-265V | 18W | 1440  | 3000   | 23 | 225 | 39 |
| KSPL018-4000K | 220-265V | 18W | 1440  | 4000   | 23 | 225 | 39 |
| KSPL018-6500K | 220-265V | 18W | 1440  | 6500   | 23 | 225 | 39 |




KSPL024.01 24W LED DOWNLIGHT



**NO-VO**

Aluminium Body  
 PMMA LGP  
 PC/PMMA diffusor  
 IP23 Protection  
 NO-VO LED Driver

| Code          | V        | W   | Lumen | Kelvin | IP | A   | B  |
|---------------|----------|-----|-------|--------|----|-----|----|
| KSPL024-3000K | 220-265V | 18W | 1920  | 3000   | 23 | 300 | 39 |
| KSPL024-4000K | 220-265V | 18W | 1920  | 4000   | 23 | 300 | 39 |
| KSPL024-6500K | 220-265V | 18W | 1920  | 6500   | 23 | 300 | 39 |






## SPL018.16 LED GLOBE CEILING ARMATURE



PC COVER  
PC BODY (WHITE)




| Code            | V        | W   | Lumen | Kelvin | IP | A    | B  |
|-----------------|----------|-----|-------|--------|----|------|----|
| SPL018.16-3000K | 220-265V | 16W | 1280  | 3000   | 20 | Ø260 | 45 |
| SPL018.16-4000K | 220-265V | 16W | 1280  | 4000   | 20 | Ø260 | 45 |
| SPL018.16-6500K | 220-265V | 16W | 1280  | 6500   | 20 | Ø260 | 45 |

## SPL018.116 LED GLOBE CEILING ARMATURE



PC COVER  
PC BODY (BLACK)




| Code             | V        | W   | Lumen | Kelvin | IP | A     | B  |
|------------------|----------|-----|-------|--------|----|-------|----|
| SPL018.116-3000K | 220-265V | 16W | 1280  | 3000   | 20 | Ø 260 | 45 |
| SPL018.116-4000K | 220-265V | 16W | 1280  | 4000   | 20 | Ø 260 | 45 |
| SPL018.116-6500K | 220-265V | 16W | 1280  | 6500   | 20 | Ø 260 | 45 |



## NV003.61 18W LED LIGHTING FIXTURE



CEILING MOUNT




| Code           | V        | W   | Lumen | Kelvin | IP | A   | B  | Body Color |
|----------------|----------|-----|-------|--------|----|-----|----|------------|
| NV003.61-3000K | 220-265V | 18W | 1440  | 3000   | 20 | 280 | 36 | White      |
| NV003.61-4000K | 220-265V | 18W | 1440  | 4000   | 20 | 280 | 36 | White      |
| NV003.61-6500K | 220-265V | 18W | 1440  | 6500   | 20 | 280 | 36 | White      |

## NV003.71 18W LED LIGHTING FIXTURE



CEILING MOUNT




| Code           | V        | W   | Lumen | Kelvin | IP | A   | B  | Body Color |
|----------------|----------|-----|-------|--------|----|-----|----|------------|
| NV003.71-3000K | 220-265V | 18W | 1440  | 3000   | 20 | 280 | 36 | Chrome     |
| NV003.71-4000K | 220-265V | 18W | 1440  | 4000   | 20 | 280 | 36 | Chrome     |
| NV003.71-6500K | 220-265V | 18W | 1440  | 6500   | 20 | 280 | 36 | Chrome     |

## NV003.81 18W LED LIGHTING FIXTURE




CEILING MOUNT




| Code           | V        | W   | Lumen | Kelvin | IP | A   | B  | Body Color  |
|----------------|----------|-----|-------|--------|----|-----|----|-------------|
| NV003.81-3000K | 220-265V | 18W | 1440  | 3000   | 20 | 280 | 36 | Matt Chrome |
| NV003.81-4000K | 220-265V | 18W | 1440  | 4000   | 20 | 280 | 36 | Matt Chrome |
| NV003.81-6500K | 220-265V | 18W | 1440  | 6500   | 20 | 280 | 36 | Matt Chrome |

### NV001.31 1xE27 CEILING LIGHTING FIXTURE




| Code     | V        | Socket | IP | A   | B  | Body Color |
|----------|----------|--------|----|-----|----|------------|
| NV001.31 | 220-265V | 1xE27  | 20 | 280 | 36 | White      |

### NV001.41 1xE27 CEILING LIGHTING FIXTURE




| Code     | V        | Socket | IP | A   | B  | Body Color |
|----------|----------|--------|----|-----|----|------------|
| NV001.41 | 220-265V | 1xE27  | 20 | 280 | 36 | Chrome     |

### NV001.51 1xE27 CEILING LIGHTING FIXTURE



| Code     | V        | Socket | IP | A   | B  | Body Color  |
|----------|----------|--------|----|-----|----|-------------|
| NV001.51 | 220-265V | 1xE27  | 20 | 280 | 36 | Matt Chrome |

## BP040 60X60 40W BACKLIGHT PANE

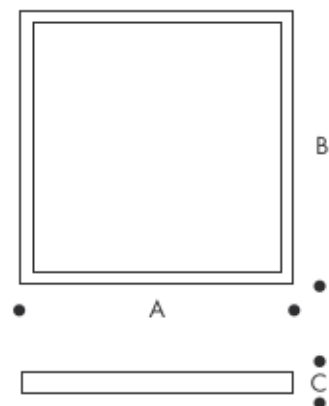


| Code        | V        | W   | Lumen | Kelvin | IP | A   | B   | C  |
|-------------|----------|-----|-------|--------|----|-----|-----|----|
| BP040-3000K | 220-265V | 40W | 3200  | 3000   | 40 | 595 | 595 | 30 |
| BP040-4000K | 220-265V | 40W | 3200  | 4000   | 40 | 595 | 595 | 30 |
| BP040-6500K | 220-265V | 40W | 3200  | 6500   | 40 | 595 | 595 | 30 |

## SP041 CEILING MOUNT FOR 60x60 SLIM LED PANEL



# SP054 60x60 SLIM LED PANEL

Box info

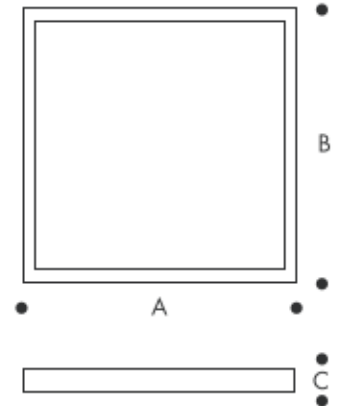

| Code        | V        | W   | Lumen | Kelvin | IP | A   | B   | C  |
|-------------|----------|-----|-------|--------|----|-----|-----|----|
| SP054-3000K | 220-265V | 54W | 4320  | 3000   | 40 | 600 | 600 | 10 |
| SP054-4000K | 220-265V | 54W | 4320  | 4000   | 40 | 600 | 600 | 10 |
| SP054-6500K | 220-265V | 54W | 4320  | 6500   | 40 | 600 | 600 | 10 |


|  |                  |      |         |        |                             |                         |                        |  |  |  |  |
|--|------------------|------|---------|--------|-----------------------------|-------------------------|------------------------|--|--|--|--|
|  | 220-265V<br>50Hz | IP23 | 50.000h | CRJ 80 | PC/PMMA<br>OPAL<br>DIFFUSOR | AL<br>ALUMINIUM<br>BODY | EASY<br>FLUSH<br>MOUNT |  |  |  |  |
|--|------------------|------|---------|--------|-----------------------------|-------------------------|------------------------|--|--|--|--|



# BA040 120 CM LED BAND LINEAR ARMATURE



CEILING MOUNT

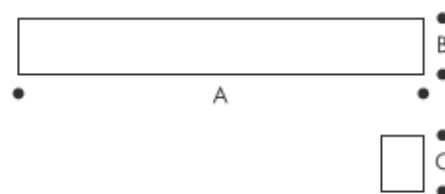


| Code        | V        | W   | Lumen | Kelvin | IP | A    | B  | C  |
|-------------|----------|-----|-------|--------|----|------|----|----|
| BA040-3000K | 220-265V | 40W | 3200  | 3000   | 40 | 1200 | 72 | 22 |
| BA040-4000K | 220-265V | 40W | 3200  | 4000   | 40 | 1200 | 72 | 22 |
| BA040-6500K | 220-265V | 40W | 3200  | 6500   | 40 | 1200 | 72 | 22 |

- Alluminium Body
- PMMA LGP
- Opal PC/PMMA Diffusor
- IP40 Protection
- NO-VO LED Driver

|  |                  |      |         |        |                             |                         |                  |  |  |  |    |            |
|--|------------------|------|---------|--------|-----------------------------|-------------------------|------------------|--|--|--|----|------------|
|  | 220-265V<br>50Hz | IP40 | 50.000h | CRI 80 | PC/PMMA<br>OPAL<br>DIFFUSOR | AL<br>ALUMINIUM<br>BODY | CEILING<br>MOUNT |  |  |  | CE | <br>40 Pcs |
|--|------------------|------|---------|--------|-----------------------------|-------------------------|------------------|--|--|--|----|------------|




## BA042 120 CM LED BAND LINEAR ARMATURE



| Code        | V        | W   | Lumen | Kelvin | IP | A    | B  | C  |
|-------------|----------|-----|-------|--------|----|------|----|----|
| BA042-3000K | 220-265V | 40W | 3200  | 3000   | 40 | 1200 | 72 | 22 |
| BA042-4000K | 220-265V | 40W | 3200  | 4000   | 40 | 1200 | 72 | 22 |
| BA042-6500K | 220-265V | 40W | 3200  | 6500   | 40 | 1200 | 72 | 22 |

- Metal Body
- PMMA LGP
- Opal PC/PMMA Diffusor
- IP40 Protection
- NO-VO LED Driver


## BA042.18 120 CM LED BAND LINEAR ARMATURE



| Code            | V        | W   | Lumen | Kelvin | IP | A   | B  | C  |
|-----------------|----------|-----|-------|--------|----|-----|----|----|
| BA042.18 -3000K | 220-265V | 18W | 3200  | 3000   | 40 | 600 | 72 | 22 |
| BA042.18 -4000K | 220-265V | 18W | 3200  | 4000   | 40 | 600 | 72 | 22 |
| BA042.18 -6500K | 220-265V | 18W | 3200  | 6500   | 40 | 600 | 72 | 22 |

- Metal Body
- PMMA LGP
- Opal PC/PMMA Diffusor
- IP40 Protection
- NO-VO LED Driver

# BA036 IP65 WATERPROOF FIXTURE

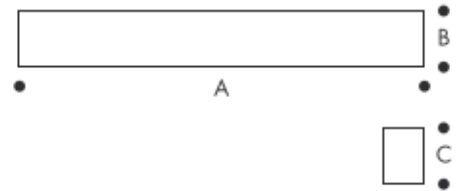

| Code        | V        | W   | Lumen | Kelvin | IP | A    | B  | C  |
|-------------|----------|-----|-------|--------|----|------|----|----|
| BA036-3000K | 220-265V | 36W | 2880  | 3000   | 65 | 1150 | 70 | 70 |
| BA036-4000K | 220-265V | 36W | 2880  | 4000   | 65 | 1150 | 70 | 70 |
| BA036-6500K | 220-265V | 36W | 2880  | 6500   | 65 | 1150 | 70 | 70 |


- PC Body
- PMMA Diffusor
- IP65 Protection
- NO-VO LED Driver

LED LIGHTING  
FIXTURES

|  |                  |      |         |        |                             |            |                  |  |  |  |  |
|--|------------------|------|---------|--------|-----------------------------|------------|------------------|--|--|--|--|
|  | 220-265V<br>50Hz | IP65 | 50.000h | CRI 80 | PC/PMMA<br>OPAL<br>DIFFUSOR | PC<br>BODY | CEILING<br>MOUNT |  |  |  |  |
|--|------------------|------|---------|--------|-----------------------------|------------|------------------|--|--|--|--|



# BA036.05 IP65 WATERPROOF FIXTURE

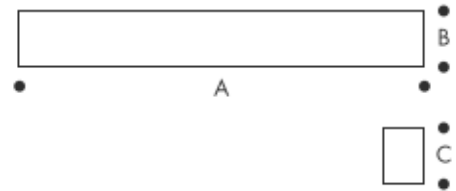

| Code           | V        | W   | Lumen | Kelvin | IP | A    | B  | C  |
|----------------|----------|-----|-------|--------|----|------|----|----|
| BA036.05-3000K | 220-265V | 36W | 2880  | 3000   | 65 | 1225 | 65 | 50 |
| BA036.05-4000K | 220-265V | 36W | 2880  | 4000   | 65 | 1225 | 65 | 50 |
| BA036.05-6500K | 220-265V | 36W | 2880  | 6500   | 65 | 1225 | 65 | 50 |

- PC Body
- PMMA Diffusor
- IP65 Protection
- NO-VO LED Driver


LED LIGHTING  
FIXTURES

|  |                  |      |         |        |                             |            |                  |  |  |  |  |
|--|------------------|------|---------|--------|-----------------------------|------------|------------------|--|--|--|--|
|  | 220-265V<br>50Hz | IP65 | 50.000h | CRI 80 | PC/PMMA<br>OPAL<br>DIFFUSOR | PC<br>BODY | CEILING<br>MOUNT |  |  |  |  |
|--|------------------|------|---------|--------|-----------------------------|------------|------------------|--|--|--|--|





# BA036.03 IP65 WATERPROOF FIXTURE

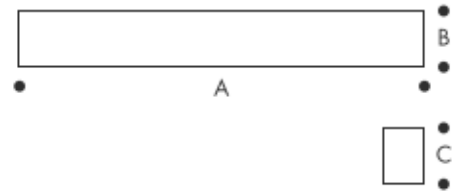

| Code           | V        | W   | Lumen | Kelvin | IP | A    | B  | C  |
|----------------|----------|-----|-------|--------|----|------|----|----|
| BA036.03-3000K | 220-265V | 36W | 2880  | 3000   | 65 | 1215 | 60 | 30 |
| BA036.03-4000K | 220-265V | 36W | 2880  | 4000   | 65 | 1215 | 60 | 30 |
| BA036.03-6500K | 220-265V | 36W | 2880  | 6500   | 65 | 1215 | 60 | 30 |

- PC Body
- PMMA Diffusor
- IP65 Protection
- NO-VO LED Driver


LED LIGHTING  
FIXTURES

|  |                  |      |         |        |                             |            |                  |  |  |  |  |
|--|------------------|------|---------|--------|-----------------------------|------------|------------------|--|--|--|--|
|  | 220-265V<br>50Hz | IP65 | 50.000h | CRI 80 | PC/PMMA<br>OPAL<br>DIFFUSOR | PC<br>BODY | CEILING<br>MOUNT |  |  |  |  |
|--|------------------|------|---------|--------|-----------------------------|------------|------------------|--|--|--|--|



ETJ036.05

IP65 EX-PROOF FIXTURE

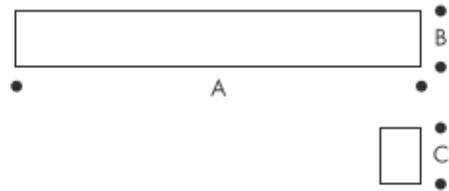

| Code        | V        | W   | Lumen | Kelvin | IP | A    | B   | C  |
|-------------|----------|-----|-------|--------|----|------|-----|----|
| BA036-3000K | 220-265V | 36W | 2880  | 3000   | 65 | 1270 | 120 | 80 |
| BA036-4000K | 220-265V | 36W | 2880  | 4000   | 65 | 1270 | 120 | 80 |
| BA036-6500K | 220-265V | 36W | 2880  | 6500   | 65 | 1270 | 120 | 80 |


- Uv and Shock Resistant Polycarbonate Body
- Shock Resistant Polycarbonate Diffuser
- IP65 Protection

LED LIGHTING  
FIXTURES

|  |                  |      |         |        |                           |                       |                  |  |  |  |  |
|--|------------------|------|---------|--------|---------------------------|-----------------------|------------------|--|--|--|--|
|  | 220-265V<br>50Hz | IP65 | 50.000h | CRI 80 | POLYCARBONATE<br>DIFFUSOR | POLYCARBONATE<br>BODY | CEILING<br>MOUNT |  |  |  |  |
|--|------------------|------|---------|--------|---------------------------|-----------------------|------------------|--|--|--|--|



YT080.001-80W HIGH BAY FIXTURE

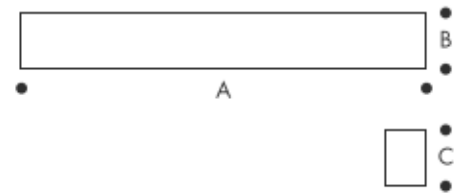

| Code            | V        | W    | Lumen | Kelvin | IP | A    | B   | C  |
|-----------------|----------|------|-------|--------|----|------|-----|----|
| YT080.001-3000K | 220-265V | 80 W | 9200  | 3000   | 40 | 1270 | 120 | 80 |
| YT080.001-4000K | 220-265V | 80 W | 9200  | 4000   | 40 | 1270 | 120 | 80 |
| YT080.001-6500K | 220-265V | 80 W | 9200  | 6500   | 40 | 1270 | 120 | 80 |


- Aluminium Body
- Tempered Glass
- Osram LED

|  |                  |      |         |        |             |                |               |  |  |  |  |
|--|------------------|------|---------|--------|-------------|----------------|---------------|--|--|--|--|
|  | 220-265V<br>50Hz | IP65 | 50.000h | CRI 80 | GLASS COVER | ALUMINIUM BODY | CEILING MOUNT |  |  |  |  |
|--|------------------|------|---------|--------|-------------|----------------|---------------|--|--|--|--|



YT080 - 80W

HIGH BAY FIXTURE

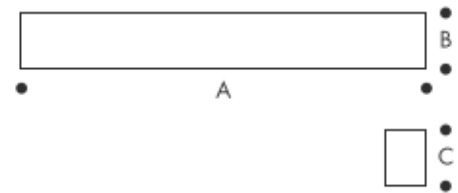

| Code          | V        | W    | Lumen | Kelvin | IP | A    | B   | C  |
|---------------|----------|------|-------|--------|----|------|-----|----|
| YT080 - 3000K | 220-265V | 80 W | 9200  | 3000   | 40 | 1270 | 120 | 80 |
| YT080 - 4000K | 220-265V | 80 W | 9200  | 4000   | 40 | 1270 | 120 | 80 |
| YT080 - 6500K | 220-265V | 80 W | 9200  | 6500   | 40 | 1270 | 120 | 80 |

- Aluminium Body
- Tempered Glass
- Osram LED
- 2 x Osram Driver

LED LIGHTING  
FIXTURES

|  |                  |      |         |        |             |                |               |  |  |  |  |
|--|------------------|------|---------|--------|-------------|----------------|---------------|--|--|--|--|
|  | 220-265V<br>50Hz | IP65 | 50.000h | CRI 80 | GLASS COVER | ALUMINIUM BODY | CEILING MOUNT |  |  |  |  |
|--|------------------|------|---------|--------|-------------|----------------|---------------|--|--|--|--|




YT120 - 120W

HIGH BAY FIXTURE



CEILING MOUNT

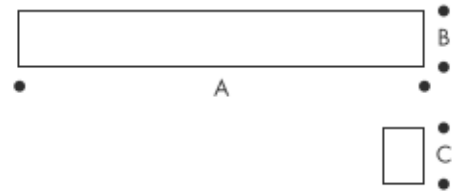

| Code          | V        | W     | Lumen | Kelvin | IP | A    | B   | C  |
|---------------|----------|-------|-------|--------|----|------|-----|----|
| YT120 - 3000K | 220-265V | 120 W | 13800 | 3000   | 40 | 1200 | 150 | 80 |
| YT120 - 4000K | 220-265V | 120 W | 13800 | 4000   | 40 | 1200 | 150 | 80 |
| YT120 - 6500K | 220-265V | 120 W | 13800 | 6500   | 40 | 1200 | 150 | 80 |

- Aluminium Body
- Tempered Glass
- Osram LED
- 2 x Osram Driver


LED LIGHTING  
FIXTURES

|  |                  |      |         |        |                |                   |                  |  |  |  |  |
|--|------------------|------|---------|--------|----------------|-------------------|------------------|--|--|--|--|
|  | 220-265V<br>50Hz | IP65 | 50.000h | CRI 80 | GLASS<br>COVER | ALUMINIUM<br>BODY | CEILING<br>MOUNT |  |  |  |  |
|--|------------------|------|---------|--------|----------------|-------------------|------------------|--|--|--|--|



YT160 - 160W

HIGH BAY FIXTURE

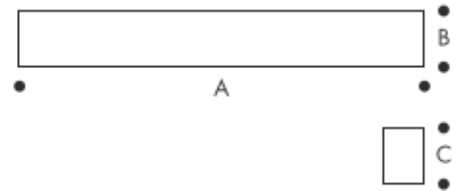

| Code          | V        | W     | Lumen | Kelvin | IP | A    | B   | C  |
|---------------|----------|-------|-------|--------|----|------|-----|----|
| YT160 - 3000K | 220-265V | 160 W | 18400 | 3000   | 40 | 1200 | 220 | 80 |
| YT160 - 4000K | 220-265V | 160 W | 18400 | 4000   | 40 | 1200 | 220 | 80 |
| YT160 - 6500K | 220-265V | 160 W | 18400 | 6500   | 40 | 1200 | 220 | 80 |


- Aluminium Body
- Tempered Glass
- Osram LED
- 2 x Osram Driver

LED LIGHTING  
FIXTURES

|  |                  |      |         |        |             |                |               |  |  |  |  |
|--|------------------|------|---------|--------|-------------|----------------|---------------|--|--|--|--|
|  | 220-265V<br>50Hz | IP65 | 50.000h | CRI 80 | GLASS COVER | ALUMINIUM BODY | CEILING MOUNT |  |  |  |  |
|--|------------------|------|---------|--------|-------------|----------------|---------------|--|--|--|--|




## T10 10W TORCH BULB




| Code      | V        | W       | Lumen | Kelvin | IP | Socket | A  | B   |
|-----------|----------|---------|-------|--------|----|--------|----|-----|
| T10-3000K | 220-265V | 10±10%W | 656   | 3000   | 23 | E27    | 60 | 115 |
| T10-4000K | 220-265V | 10±10%W | 656   | 4000   | 23 | E27    | 60 | 115 |
| T10-6500K | 220-265V | 10±10%W | 656   | 6500   | 23 | E27    | 60 | 115 |

## T15 15W TORCH BULB




| Code      | V        | W       | Lumen | Kelvin | IP | Socket | A  | B   |
|-----------|----------|---------|-------|--------|----|--------|----|-----|
| T15-3000K | 220-265V | 15±10%W | 1095  | 3000   | 23 | E27    | 70 | 125 |
| T15-4000K | 220-265V | 15±10%W | 1095  | 4000   | 23 | E27    | 70 | 125 |
| T15-6500K | 220-265V | 15±10%W | 1095  | 6500   | 23 | E27    | 70 | 125 |

## T20 18W TORCH BULB




| Code      | V        | W       | Lumen | Kelvin | IP | Socket | A  | B   |
|-----------|----------|---------|-------|--------|----|--------|----|-----|
| T20-3000K | 220-265V | 18±10%W | 1465  | 3000   | 23 | E27    | 78 | 143 |
| T20-4000K | 220-265V | 18±10%W | 1465  | 4000   | 23 | E27    | 78 | 143 |
| T20-6500K | 220-265V | 18±10%W | 1465  | 6500   | 23 | E27    | 78 | 143 |

## T30 28W TORCH BULB




| Code      | V        | W       | Lumen | Kelvin | IP | Socket | A  | B   |
|-----------|----------|---------|-------|--------|----|--------|----|-----|
| T30-3000K | 220-265V | 28±10%W | 2098  | 3000   | 23 | E27    | 98 | 168 |
| T30-4000K | 220-265V | 28±10%W | 2098  | 4000   | 23 | E27    | 98 | 168 |
| T30-6500K | 220-265V | 28±10%W | 2098  | 6500   | 23 | E27    | 98 | 168 |

## T40 40W TORCH BULB



| Code      | V        | W       | Lumen | Kelvin | IP | Socket | A   | B   |
|-----------|----------|---------|-------|--------|----|--------|-----|-----|
| T40-3000K | 220-265V | 40±10%W | 3668  | 3000   | 23 | E27    | 115 | 185 |
| T40-4000K | 220-265V | 40±10%W | 3668  | 4000   | 23 | E27    | 115 | 185 |
| T40-6500K | 220-265V | 40±10%W | 3668  | 6500   | 23 | E27    | 115 | 185 |

## T50 50W TORCH BULB



| Code      | V        | W       | Lumen | Kelvin | IP | Socket | A   | B   |
|-----------|----------|---------|-------|--------|----|--------|-----|-----|
| T50-3000K | 220-265V | 50±10%W | 4523  | 3000   | 23 | E27    | 140 | 220 |
| T50-4000K | 220-265V | 50±10%W | 4523  | 4000   | 23 | E27    | 140 | 220 |
| T50-6500K | 220-265V | 50±10%W | 4523  | 6500   | 23 | E27    | 140 | 220 |



## A007 7W LED BULB



| Code    | V        | W  | Lumen | Kelvin | IP | Socket |
|---------|----------|----|-------|--------|----|--------|
| A007.01 | 220-265V | 7W | 560   | 3000   | 23 | E27    |
| A007.02 | 220-265V | 7W | 560   | 4000   | 23 | E27    |
| A007.03 | 220-265V | 7W | 560   | 6500   | 23 | E27    |

## A009 9W LED BULB



| Code    | V        | W  | Lumen | Kelvin | IP | Socket |
|---------|----------|----|-------|--------|----|--------|
| A009.01 | 220-265V | 9W | 720   | 3000   | 23 | E27    |
| A009.02 | 220-265V | 9W | 720   | 4000   | 23 | E27    |
| A009.03 | 220-265V | 9W | 720   | 6500   | 23 | E27    |

## A012 12W LED BULB



| Code    | V        | W   | Lumen | Kelvin | IP | Socket |
|---------|----------|-----|-------|--------|----|--------|
| A012.01 | 220-265V | 12W | 960   | 3000   | 23 | E27    |
| A012.02 | 220-265V | 12W | 960   | 4000   | 23 | E27    |
| A012.02 | 220-265V | 12W | 960   | 6500   | 23 | E27    |

## A015 15W LED BULB



| Code    | V        | W   | Lumen | Kelvin | IP | Socket |
|---------|----------|-----|-------|--------|----|--------|
| A012.01 | 220-265V | 15W | 1350  | 3000   | 23 | E27    |
| A012.02 | 220-265V | 15W | 1350  | 4000   | 23 | E27    |
| A012.02 | 220-265V | 15W | 1350  | 6500   | 23 | E27    |