



LED LIGHTING FIXTURES

www.pesina.com.tr

SPL024.33 24W LED SLIM PANEL WITH MICROWAVE SENSOR



4-5m
Microwave Sensor



Switch between
3 light colors



Flush Mount & Ceiling Mount



Voltage	Lighting Power	Detection Range	Detection Height	Time - Delay	Die Cut Size	Working Temperature	Protection	Box Size
 230-240V-50/60Hz	1920 Lumen	 360° Max. 5 m	 2.2-4 m	 10 sec - 15 min	 Adjustable	 10°C - +40°C	 IP20 Class II	 30 pcs 325 x 465 x 650

KSPL024.33 24W LED SLIM PANEL WITH MICROWAVE SENSOR



4-5m
Microwave Sensor










Switch between
3 light colors



Flush Mount & Ceiling Mount




Voltage	Lighting Power	Detection Range	Detection Height	Time - Delay	Die Cut Size	Working Temperature	Protection	Box Size
 230-240V-50/60Hz	1920 Lumen	 360° Max. 5 m	 2.2-4 m	 10 sec - 15 min	 Adjustable	 10°C - +40°C	 IP20 Class II	 30 pcs 325 x 465 x 650



NV001 2 x E27 FIXTURE WITH MOTION SENSOR


(Metal Body & Glass Cover)

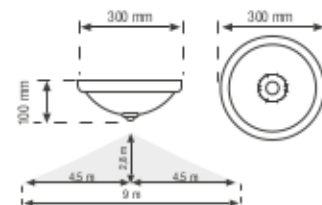

- Max: 2 x 9W E27 Led Bulb
- Motion sensor with 360° detection area
- Adjustable time and lux settings
- Easy installation

NV002 2 x E27 FIXTURE WITH MOTION SENSOR & EMERGENCY LIGHT

(Metal Body & Glass Cover)

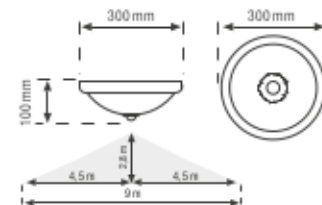

- Max: 2 x 9W E27 Led Bulb
- Motion sensor with 360° detection area
- Adjustable time and lux settings
- Easy installation
- 5 hours emergency led light duration
- 3x1000mAh Ni-Mh Battery
- 360 Lumen Emergency light

Voltage 230-240V - 50/60Hz	Rated Load 2x9W - E27	Detection Range Max. 9m	Detection Height Max. 2.5m	Time - Delay 10sn - 5sk	Ambient Light 2-2000 lux	Working Temperature 20°C - +40°C	Protection IP20 1 Sinf	Box Size 540x 610x 310
-------------------------------	--------------------------	----------------------------	-------------------------------	----------------------------	-----------------------------	-------------------------------------	------------------------------	---------------------------



NV001.01 2 x E27 FIXTURE WITH MOTION SENSOR


(Metal Body & Transparent PC Cover)



CEILING MOUNT



- Max: 2 x 9W E27 Led Bulb
- Motion sensor with 360° detection area
- Adjustable time and lux settings
- Easy installation

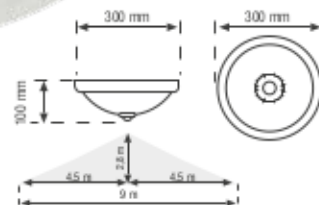

NV002.01 2 x E27 FIXTURE WITH MOTION SENSOR & EMERGENCY LIGHT

(Metal Body & Transparent PC Cover)




CEILING MOUNT

Emergency Light



- Max: 2 x 9W E27 Led Bulb
- Motion sensor with 360° detection area
- Adjustable time and lux settings
- Easy installation
- 5 hours emergency led light duration
- 3x1000mAh Ni-Mh Battery
- 360 Lumen Emergency light

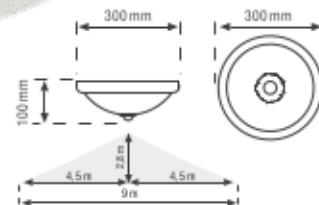


Voltage 230-240V - 50/60Hz	Rated Load 2x9W - E27	Detection Range Max. 9m	Detection Height Max. 2.5m	Time-Delay 10sn - 5sk	Ambient Light 2-2000 lux	Working Temperature 20°C - +40°C	Protection IP20	Box Size 10 pcs 540x610x310
-------------------------------	--------------------------	----------------------------	-------------------------------	--------------------------	-----------------------------	-------------------------------------	--------------------	-----------------------------------



NV001.02 2 x E27 FIXTURE WITH MOTION SENSOR


(Metal Body & White PC Cover)

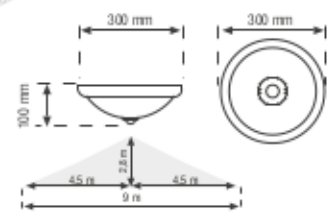

- Max: 2 x 9W E27 Led Bulb
- Motion sensor with 360° detection area
- Adjustable time and lux settings
- Easy installation

NV002.02 2 x E27 FIXTURE WITH MOTION SENSOR & EMERGENCY LIGHT

(Metal Body & White PC Cover)

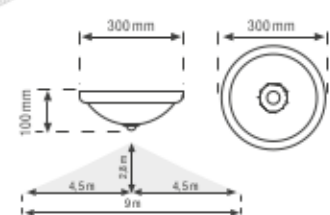

- Max: 2 x 9W E27 Led Bulb
- Motion sensor with 360° detection area
- Adjustable time and lux settings
- Easy installation
- 5 hours emergency led light duration
- 3x1000mAh Ni-Mh Battery
- 360 Lumen Emergency light

Voltage 230-240V ~ 50/60Hz	Rated Load 2x9W - E27	Detection Range Max. 9m	Detection Height Max. 2.2m	Time - Delay 10sec - 5min	Ambient Light 2-2000 lux	Working Temperature 20°C ~ +40°C	Protection IP 20	Box Size 540 x 610 x 310
-------------------------------	--------------------------	----------------------------	-------------------------------	------------------------------	-----------------------------	-------------------------------------	---------------------	-----------------------------



NV003.10 18W LED LIGHTING FIXTURE WITH MOTION SENSOR


(Metal Body & White PC Cover)



CEILING MOUNT



- Max: 2 x 9W E27 Led Bulb
- Motion sensor with 360° detection area
- Adjustable time and lux settings
- Easy installation

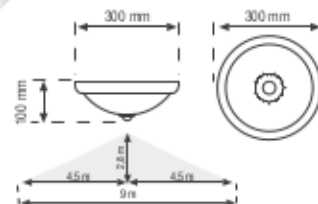

NV004.10 18W LED FIXTURE WITH SENSOR & EMERGENCY LIGHT

(Metal Body & White PC Cover)




CEILING MOUNT

Emergency Light



- Max: 2 x 9W E27 Led Bulb
- Motion sensor with 360° detection area
- Adjustable time and lux settings
- Easy installation
- 5 hours emergency led light duration
- 3x1000mAh Ni-Mh Battery
- 360 Lumen Emergency light

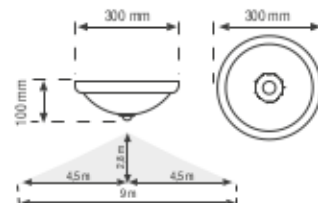

Voltage	Rated Load	Detection Range	Detection Height	Time - Delay	Die Cut Size	Working Temperature	Protection	Box Size
230-240V ~50/60Hz	2x9W - E27	360° Max. 9m	Max. 2.5m	10sec - 5min	2-2000 lux	20°C - +40°C	IP 20 I Senf	540 x 610 x 310 10 pcs




NV003.20 18W LEDLİ SENSÖRLÜ SLİM TAVAN ARMATÜRÜ

(Metal Body & White PC Cover)



CEILING MOUNT

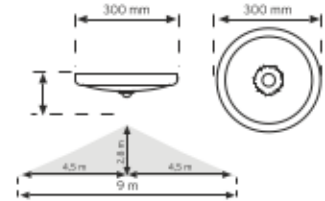

- Max: 2 x 9W E27 Led Bulb
- Motion sensor with 360° detection area
- Adjustable time and lux settings
- Easy installation


NV004.20 18W LEDLİ ACİL KİTLİ SENSÖRLÜ SLİM TAVAN ARMATÜRÜ

(Metal Body & White PC Cover)



CEILING MOUNT

Emergency
Light

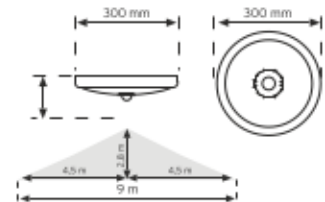

- Max: 2 x 9W E27 Led Bulb
- Motion sensor with 360° detection area
- Adjustable time and lux settings
- Easy installation
- 5 hours emergency led light duration
- 3x1000mAh Ni-Mh Battery
- 360 Lumen Emergency light

Voltage	Rated Load	Detection Range	Detection Height	Time - Delay	Die Out Size	Working Temperature	Protection	Box Size
230-240V ~50/60Hz	2x9W - E27	Max. 9m	Max. 2.5m	10sec - 5min	2-2000 lux	20°C - +40°C	IP 20 I Seif	12 pcs 540 x 610 x 310




TS EN 60969-2-1
TS EN 60580-2-1



NV003.31 18W LED SLIM FIXTURE WITH MICROWAVE SENSOR**(White frame & sanded glass)****NV003.41 18W LED SLIM FIXTURE WITH MICROWAVE SENSOR****(Chrome frame & sanded glass)****NV003.51 18W LED SLIM FIXTURE WITH MICROWAVE SENSOR****(Matt chrome frame & sanded glass)**

- Sıva üstü kolay montaj
- Ayarlanabilir zaman ve lux özelliği
- Acil aydınlatma ışık gücü 360 Lümen
- LED'li aydınlatma sayesinde A sınıfı tasarruflu enerji tüketimi
- 360° hareket sensörü sayesinde her yönden algılama
- Kumlanmış cam sayesinde göz yormayan homojen ışık dağılımı
- Dijital kontrol sayesinde hatasız algılama

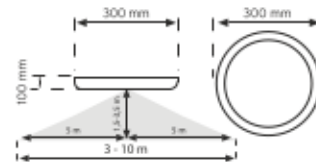


Voltage	Rated Load	Detection Range	Detection Height	Time - Delay	Die Out Size	Working Temperature	Protection	Box Size
230-240V ~50/60Hz	24W - E27	360° Max. 9m	Max. 2.5m	10sac - 5min	2-2000 lux	20°C - +40°C	IP 20 I Sınıf	12 pcs 540 x 610 x 310



NV011 PIR MOTION SENSOR



- 360° detection range
- Easy surface mount installation
- Adjustable time, lux settings




Voltage	Rated Load	Detection Range	Detection Height	Time - Delay	Ambient Light	Working Temperature	Protection	Box Size
230-240V-50/60Hz	800 W / 400 W	360° Max. 6m	2-2.4 m	10 sec - 7 min	10-2000 lux	20°C - +40°C	IP20 Class II	50 pcs 630 x 225 x 265

NV012 PIR MOTION SENSOR



- 360° detection range
- Easy recessed mount installation
- Adjustable time, lux settings




Voltage	Rated Load	Detection Range	Detection Height	Time - Delay	Ambient Light	Die Out Size	Working Temperature	Protection	Box Size
230-240V-50/60Hz	1200 W / 400 W	360° Max. 8 m	2-2.4 m	10 sec - 15 min	10-2000 lux	Ø70 mm	10°C - +40°C	IP20 I 5 mV	100 pcs 400 x 450 x 370



NV013 RADAR HAREKET SENSÖRÜ



- 360° detection range
- Easy surface mount installation
- Adjustable time, lux settings




Voltage	Rated Load	Detect on Range	Detection Height	Time - Delay	Ambient Light	Working Temperature	Protection	Box Size
230-240V-50/60Hz	2000 W / 400 W	360° Max. 8 m	1.5-3.5 m	8 sec - 12 min	3-50-3000 lux	20°C - +40°C	IP20 Class II	50 pcs 560x420x248

NV014 RADAR HAREKET SENSÖRÜ



- 360° detection range
- Easy recessed mount installation
- Adjustable time, lux settings




Voltage	Rated Load	Detect on Range	Detection Height	Time - Delay	Ambient Light	Die Out Size	Working Temperature	Protection	Box Size
230-240V-50/60Hz	1200 W / 300 W	360° Max. 8 m	1.5-3.5 m	10 sec - 15 min	3-2000 lux	Ø70 mm	10°C - +40°C	IP20 Class II	100 pcs 400x450x370



NV015 3x MOTION SENSOR



- 360° detection range
- Easy surface mount installation
- Adjustable time, sense and lux settings

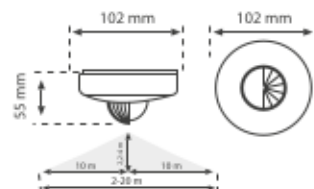


Voltage	Rated Load	Detect on Range	Detection Height	Time - Delay	Ambient Light	Working Temperature	Protection	Box Size
230-240V-50/60Hz	2000 W / 1000 W	360°	2-2.4 m	10 s - 10 d	10-2000 lx	20°C - +40°C	IP20	570 x 355 x 240

NV016 3x MOTION SENSOR




- 360° detection range
- Easy recessed mount installation
- Adjustable time, sense and lux settings




Voltage	Rated Load	Detect on Range	Detection Height	Time - Delay	Ambient Light	Die Out Size	Working Temperature	Protection	Box Size
230-240V-50/60Hz	2000 W / 1000 W	360°	2-2.4 m	10 s - 7 dk	5-2000 lx	Ø80 mm	20°C - +40°C	IP20	600 x 520 x 250



NV017 MİNİ HAREKET SENSÖRÜ

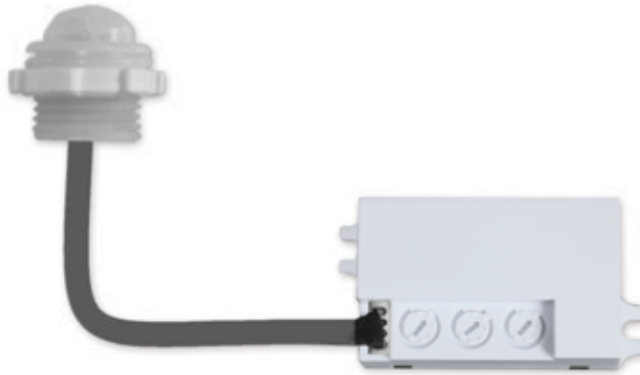

- 360° detection range
- Easy surface mount installation
- Adjustable time, sense and lux settings

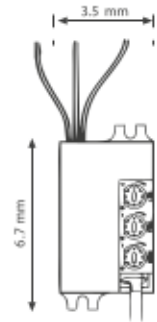


Voltage	Rated Load	Detect on Range	Detection Height	Time - Delay	Ambient Light	Working Temperature	Protection	Box Size
230-240V-50/60Hz	100W	360°	1.8-2.5m	10 sn - 7 dk	10-2000 lux	20°C - +40°C	IP20	430 x 270 x 275

NV018 RADAR HAREKET SENSÖRÜ




- 360° detection range
- Easy surface mount installation
- Adjustable time, sense and lux settings
- Detection behind wall and windows
- It can be used inside fixtures.

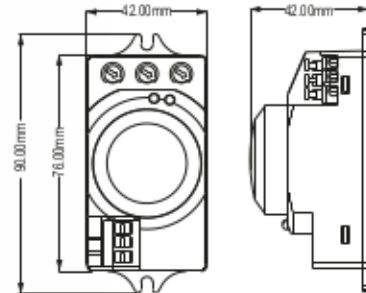

Voltage	Rated Load	Detect on Range	Detection Height	Time - Delay	Ambient Light	Die Cut Size	Protection	Box Size
230-240V-50/60Hz	1200 W / 300 W	360°	1.5-3.5m	8 sn - 12 dk	2-2000 lux	15°C - +70°C	IP20	535 x 325 x 220




NV012.30 PIR MOTION SENSOR

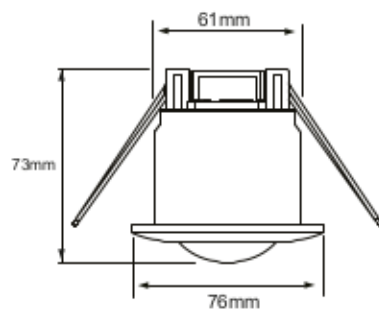

- 360° detection range
- Easy surface mount installation
- Adjustable time, lux settings

Voltage	Rated Load	Detection Range	Detection Height	Time - Delay	Ambient Light	Be On Size	Working Temperature	Protection	Box Size
230-240V-50/60Hz	1200 W / 200 W	360° 8 m	2.2 - 4.0 m	10 sec - 15 min	2000 lux	Ø65 mm	20°C - +40°C	IP20 Class II	50 pcs 470 x 420 x 200

NV020 PIR MOTION SENSOR

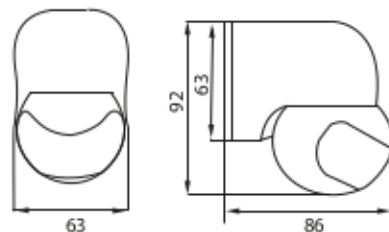


- 180° detection range
- Easy surface mount installation
- Adjustable time, lux settings

Voltage	Rated Load	Detection Range	Detection Height	Time - Delay	Ambient Light	Working Temperature	Protection	Box Size
230-240V-50/60Hz	1200 W / 300 W	180° 12 m	1.8 - 2.5 m	10 sec - 7 min	10-2000 lux	20°C - +40°C	IP20 Class II	50 pcs 475 x 385 x 210




NV021 PIR MOTION SENSOR

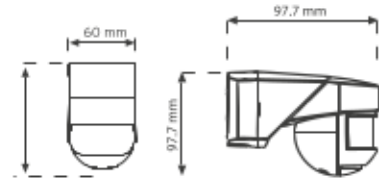

- 180° / 360° seçenekleri
- Ayarlanabilir zaman, lux ve mesafe özelliği
- Kontrol sayesinde hatasız algılama
- Yukarı, aşağı, sağ ve sol algılama ayarı
- Köşelere monte edilebilir

Voltage	Rated Load	Detection Range	Detection Height	Time - Delay	Ambient Light	Working Temperature	Protection	Box Size
230-240V-50/60Hz	2000 W / 1000 W	360° 12 m	1.8-2.5 m	10 sec - 10 min	10-200 lux	20°C - +40°C	IP 20 Class II	50 pcs 530 x 440 x 185

NV022 WALL MOUNT INFRARED SENSOR

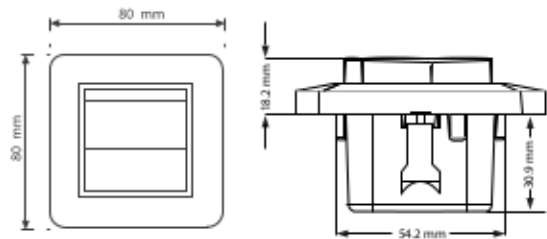

- HF sensör teknolojisi sayesinde her yönden algılama
- Duvar, alçıpan ve cam arkasından algılama
- Sıva üstü kolay montaj
- Ayarlanabilir zaman, lux ve mesafe özelliği
- Dijital kontrol sayesinde hatasız algılama


Voltage	Rated Load	Detection Range	Detection Height	Time - Delay	Ambient Light	Working Temperature	Protection	Box Size
230-240V-50/60Hz	500 W / 200 W	8 m	1 - 8 m	10 sec - 7 min	3-2000 lux	20°C - +40°C	IP 20 Class II	50 pcs 475 x 385 x 210






LED LIGHTING FIXTURES

PL003 3W LED DOWNLIGHT

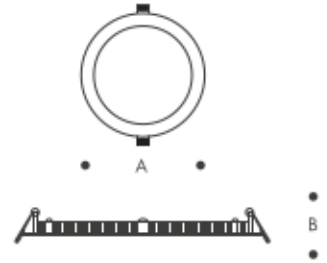


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	Die Cut (mm)	Housing color
PL003-6500	220-265V	6W	240	6500	23	Ø85	18	Ø75	White
PL003-4000	220-265V	6W	240	4000	23	Ø85	18	Ø75	White
PL003-3000	220-265V	6W	240	3000	23	Ø85	18	Ø75	White

PL006 6W LED DOWNLIGHT

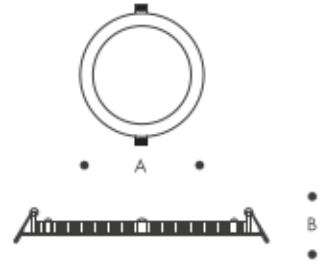


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	Die Cut (mm)	Housing color
PL006-6500	220-265V	6W	480	6500	23	Ø122	18	Ø110	White
PL006-4000	220-265V	6W	480	4000	23	Ø122	18	Ø110	White
PL006-3000	220-265V	6W	480	3000	23	Ø122	18	Ø110	White

PL009 9W LED DOWNLIGHT

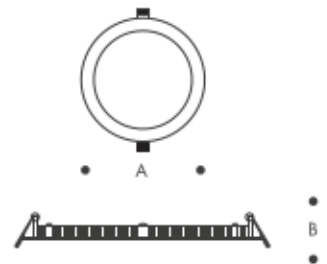

Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	Die Cut (mm)	Housing color
PL009-6500	220-265V	9W	720	6500	23	Ø145	18	Ø135	White
PL009-4000	220-265V	9W	720	4000	23	Ø145	18	Ø135	White
PL009-3000	220-265V	9W	720	3000	23	Ø145	18	Ø135	White


PL012 12W LED DOWNLIGHT



•
B
•

Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	Die Cut (mm)	Housing color
PL012-6500	220-265V	12W	960	6500	23	Ø170	18	Ø160	White
PL012-4000	220-265V	12W	960	4000	23	Ø170	18	Ø160	White
PL012-3000	220-265V	12W	960	3000	23	Ø170	18	Ø160	White


PL015 15W LED DOWNLIGHT



•
B
•

Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	Die Cut (mm)	Housing color
PL015-6500	220-265V	15W	1200	6500	23	Ø190	18	Ø180	White
PL015-4000	220-265V	15W	1200	4000	23	Ø190	18	Ø180	White
PL015-3000	220-265V	15W	1200	3000	23	Ø190	18	Ø180	White

PL018 18W LED DOWNLIGHT




•
B
•

Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	Die Cut (mm)	Housing color
PL018-6500	220-265V	18W	1440	6500	23	Ø220	18	Ø210	White
PL018-4000	220-265V	18W	1440	4000	23	Ø220	18	Ø210	White
PL018-3000	220-265V	18W	1440	3000	23	Ø220	18	Ø210	White

SPL012 12W CIRCULAR LED PANEL



SIVA ALTI





Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	Housing color
SPL012.00	220-265V	12W	960	6500/4000/3000	23	Ø163	25	White
SPL012.01	220-265V	12W	960	6500/4000/3000	23	Ø163	25	Black

SPL018 18W CIRCULAR LED PANEL



SIVA ALTI

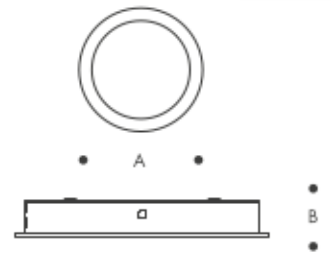


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	Housing color
SPL018.00	220-265V	18W	1440	6500/4000/3000	23	Ø213	26	White
SPL018.01	220-265V	18W	1440	6500/4000/3000	23	Ø213	26	Black

SPL024 24W CIRCULAR LED PANEL



SIVA ALTI

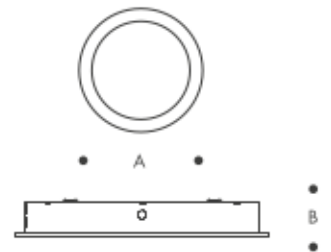

Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	Housing color
SPL018.00	220-265V	18W	1920	6500/4000/3000	23	Ø293	26	White
SPL018.01	220-265V	18W	1920	6500/4000/3000	23	Ø293	26	Black


KSPL018 18W SQUARE LED PANEL



SURFACE MOUNT



45 Pcs
290 x 535 x 580

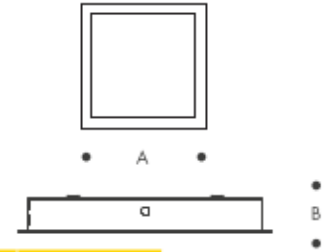

Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	Housing color
KSPL018.00	220-265V	18W	1440	6500/4000/3000	23	210 x 210	27	White
KSPL018.00	220-265V	18W	1440	6500/4000/3000	23	210 x 210	27	Black


KSPL024 24W SQUARE LED PANEL



SURFACE MOUNT



30 Pcs
220 x 535 x 630

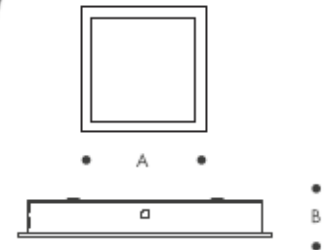


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	Housing color
KSPL024.00	220-265V	24W	1920	6500/4000/3000	23	285 x 285	27	White
KSPL024.00	220-265V	24W	1920	6500/4000/3000	23	285 x 285	27	Black

SPL012 12W CIRCULAR LED PANEL



SIVA ALTI





Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	Housing color
SPL012.02	220-265V	12W	960	6500/4000/3000	23	Ø163	25	Pink
SPL012.03	220-265V	12W	960	6500/4000/3000	23	Ø163	25	Blue

SPL018 18W CIRCULAR LED PANEL



SIVA ALTI




Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	Housing color
SPL018.02	220-265V	18W	1440	6500/4000/3000	23	Ø213	26	Pink
SPL018.03	220-265V	18W	1440	6500/4000/3000	23	Ø213	26	Blue

SPL024 24W CIRCULAR LED PANEL



SIVA ALTI

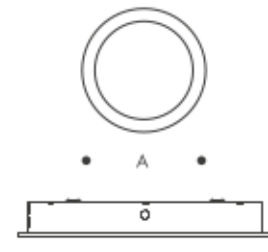

Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	Housing color
SPL018.02	220-265V	18W	1920	6500/4000/3000	23	Ø293	26	White
SPL018.03	220-265V	18W	1920	6500/4000/3000	23	Ø293	26	Black


KSPL018 18W SQUARE LED PANEL



SURFACE MOUNT



45 Adet
200 x 530 x 580

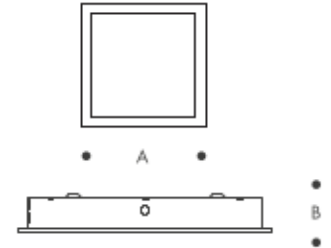


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	Housing color
KSPL018.02-6500	220-265V	18W	1440	6500	23	210 x 210	27	Pink
KSPL018.03-3000	220-265V	18W	1440	3000	23	210 x 210	27	Blue


KSPL024 24W SQUARE LED PANEL



SURFACE MOUNT



30 Pcs
220 x 530 x 630

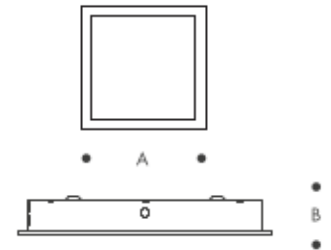

Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	Housing color
KSPL024.02-6500	220-265V	24W	1920	6500	23	285 x 285	27	Pink
KSPL024.03-3000	220-265V	24W	1920	3000	23	285 x 285	27	Blue

NRS030 - 30W TRACK LIGHT

LED



Code	V	W	Lumen	Kelvin	IP	Body Color
RS030-6500	220-265V	30W	2400	6500	20	Black/White
RS030-4000	220-265V	30W	2400	4000	20	Beyaz/Siyah
RS030-3000	220-265V	30W	2400	3000	20	Black/White

SPL018.16 - 16W LED GLOB TAVAN ARMATÜRÜ

LED



KOD	V	W	Lümen	Kelvin	IP	Güç Ünitesi	Kasa Rengi	Fiyat (USD)
SPL018.16-6500	220-265V	16W	1280	6500	20	VAR	Beyaz/Siyah	5.50 USD
SPL018.16-4000	220-265V	16W	1280	4000	20	VAR	Beyaz/Siyah	5.50 USD

PL005.11 5W LED DOWNLIGHT



SIVA ALTI



KOD	V	W	Lümen	Kelvin	IP	Fiyat (USD)
PL005-6500	110-265V	5W	450	6500	23	2.00 USD
PL005-4000	110-265V	5W	450	4000	23	2.00 USD
PL005-3000	110-265V	5W	450	3000	23	2.00 USD

PL007.11 7W LED DOWNLIGHT



SIVA ALTI



KOD	V	W	Lümen	Kelvin	IP	Fiyat (USD)
PL007.11-6500	110-265V	7W	560	6500	23	3.00 USD
PL007.11-4000	110-265V	7W	560	4000	23	3.00 USD
PL007.11-3000	110-265V	7W	560	3000	23	3.00 USD

PL012.11 12W LED DOWNLIGHT



SIVA ALTI



KOD	V	W	Lümen	Kelvin	IP	Fiyat (USD)
PL012.11-6500	110-265V	12W	960	6500	23	4.00 USD
PL012.11-4000	110-265V	12W	960	4000	23	4.00 USD
PL012.11-3000	110-265V	12W	960	3000	23	4.00 USD

PL016.11 16W LED DOWNLIGHT



SIVA ALTI



KOD	V	W	Lümen	Kelvin	IP	Fiyat (USD)
PL016-6500	110-265V	16W	1280	6500	23	5.00 USD
PL016-4000	110-265V	16W	1280	4000	23	5.00 USD
PL016-3000	110-265V	16W	1280	3000	23	5.00 USD

PL022.11 22W LED DOWNLIGHT



SIVA ALTI




KOD	V	W	Lümen	Kelvin	IP	Fiyat (USD)
PL022.11-6500	110-265V	22W	1760	6500	23	6.00 USD
PL022.11-4000	110-265V	22W	1760	4000	23	6.00 USD
PL022.11-3000	110-265V	22W	1760	3000	23	6.00 USD

- Easy installation
- Pc Fireproof body
- Pc/PMMA diffuser
- Long life
- Uniform light distribution

	220-265V 50Hz	IP23	50.000h	CRI 80	PC/PMMA OPAL DIFFUSER
PC HOUSING	RESESED MOUNT				CE




NV003.61 18W LED CEILING FIXTURE

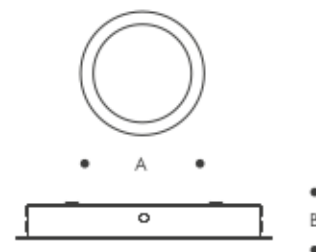


Code	V	Watt	IP	A (mm)	B (mm)	Frame Colour
NV003.61	220-265V	18W	20	280	36	White
NV003.61	220-265V	18W	20	280	36	White
NV003.61	220-265V	18W	20	280	36	White

NV003.71 18W LED CEILING FIXTURE

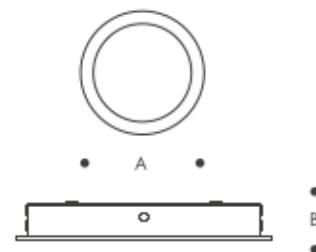


Code	V	Watt	IP	A (mm)	B (mm)	Frame Colour
NV003.71	220-265V	18W	20	280	36	Chrome
NV003.71	220-265V	18W	20	280	36	Chrome
NV003.71	220-265V	18W	20	280	36	Chrome

NV003.81 18W LED CEILING FIXTURE

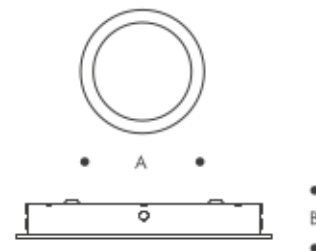


Code	V	Watt	IP	A (mm)	B (mm)	Frame Colour
NV003.81	220-265V	18W	20	280	36	Matt Chrome
NV003.81	220-265V	18W	20	280	36	Matt Chrome
NV003.81	220-265V	18W	20	280	36	Matt Chrome

NV001.31 1xE27 CEILING FIXTURE

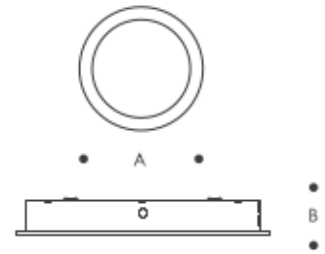


Code	V	Bulb Socket Type	IP	A (mm)	B (mm)	Frame Colour
NV001.31	220-265V	E27	20	280	36	White

NV001.41 1xE27 CEILING FIXTURE

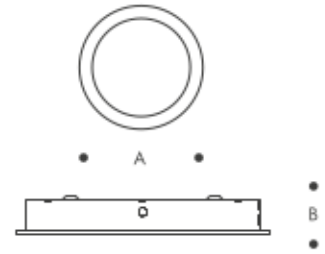


Code	V	Bulb Socket Type	IP	A (mm)	B (mm)	Frame Colour
NV001.41	220-265V	E27	20	280	36	Chrome

NV001.51 1xE27 CEILING FIXTURE

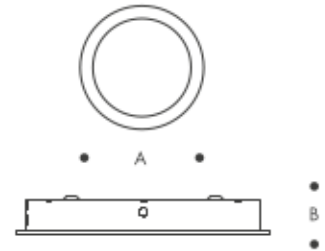

Code	V	Bulb Socket Type	IP	A (mm)	B (mm)	Frame Colour
NV001.51	220-265V	E27	20	280	36	Matt Chrome


BP040 60x60 36W BACKLIGHT LED PANEL



- NO-VO LED driver

Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing Color & Frame
BP040-6500	220-265V	36W	2880	6500	40	595	595	30	White
BP040-4000	220-265V	36W	2880	4000	40	595	595	30	White
BP040-3000	220-265V	36W	2880	3000	40	595	595	30	White


BP040.01 60x60 36W BACKLIGHT LED PANEL



- ENEC Certificated LED driver

Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing Color & Frame
BP040-6500	220-265V	36W	2880	6500	40	595	595	30	White
BP040-4000	220-265V	36W	2880	4000	40	595	595	30	White
BP040-3000	220-265V	36W	2880	3000	40	595	595	30	White

SP041 CEILING MOUNT ADAPTOR FOR 60x60 LED PANELS



Code


SP041

SP041.01 CLIP-IN

Code

SP041.01


BP040 60x60 36W BACKLIGHT LED PANEL



- NO-VO LED driver

Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing Color & Frame
BP040-6500	220-265V	36W	2880	6500	40	595	595	30	White
BP040-4000	220-265V	36W	2880	4000	40	595	595	30	White
BP040-3000	220-265V	36W	2880	3000	40	595	595	30	White


BP040.01 60x60 36W BACKLIGHT LED PANEL



- ENEC Certificated LED driver

Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing Color & Frame
BP040-6500	220-265V	36W	2880	6500	40	595	595	30	White
BP040-4000	220-265V	36W	2880	4000	40	595	595	30	White
BP040-3000	220-265V	36W	2880	3000	40	595	595	30	White


BP040.48 60x60 48W SIVA ALTI BACKLIGHT LED PANEL



- NO-VO LED driver


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing Color & Frame
BP040.48-6500	220-265V	48W	3840	6500	40	595	595	30	White
BP040.48-4000	220-265V	48W	3840	4000	40	595	595	30	White
BP040.48-3000	220-265V	48W	3840	3000	40	595	595	30	White

BA036.54 54W LED YATAY BANT ARMATÜR

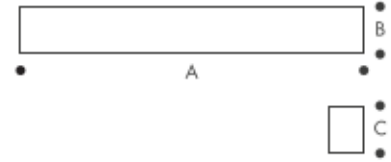



Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Base Material
BA036.54-6500	220-265V	54W	4320	6500	40	1200	73	25	White Metal
BA036.54-4000	220-265V	54W	4320	4000	40	1200	73	25	White Metal
BA036.54-3000	220-265V	54W	4320	3000	40	1200	73	25	White Metal

BA036.72 72W LED YATAY BANT ARMATÜR

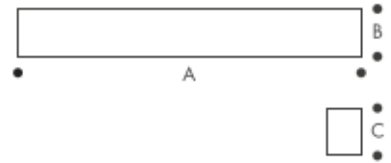


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Base Material
BA036.72-6500	220-265V	72W	5760	6500	40	1200	100	25	White Metal
BA036.72-4000	220-265V	72W	5760	4000	40	1200	100	25	White Metal
BA036.72-3000	220-265V	72W	5760	3000	40	1200	100	25	White Metal

BA036.96 96W LED YATAY BANT ARMATÜR

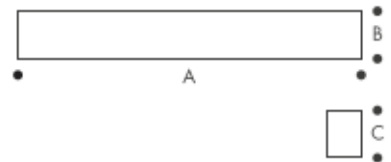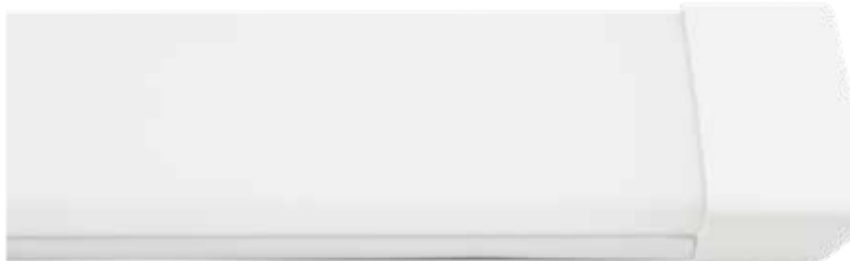


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Base Material
BA036.96-6500	220-265V	96W	7680	6500	40	1200	96	25	White Metal
BA036.-96-4000	220-265V	96W	7680	4000	40	1200	96	25	White Metal
BA036.96-3000	220-265V	96W	7680	3000	40	1200	96	25	White Metal

BA042.48 LED BATTEN LINEAR ARMATURE



- Metal Base
- PP Diffuser
- IP40 Protection
- NO-VO LED driver

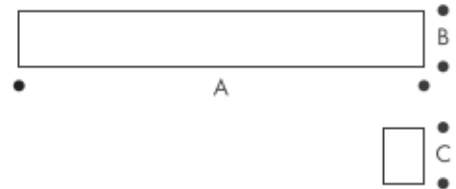


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing material/color
BA042-6500	220-265V	48W	3200	6500	40	1250	55	40	Metal White
BA042-4000	220-265V	48W	3200	4000	40	1250	55	40	Metal White
BA042-3000	220-265V	48W	3200	3000	40	1250	55	40	Metal White

BA042.72 LED BATTEN LINEAR ARMATURE



- Metal Base
- PP Diffuser
- IP40 Protection
- NO-VO LED driver

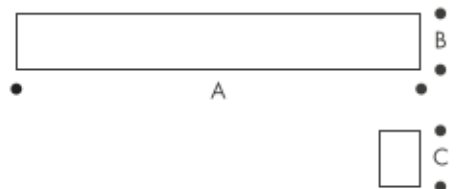


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing material/color
BA042.18-6500	220-265V	18W	1440	6500	40	1250	55	40	Metal White
BA042.18-4000	220-265V	18W	1440	4000	40	1250	55	40	Metal White
BA042.18-3000	220-265V	18W	1440	3000	40	1250	55	40	Metal White



BA042 120 CM LED DUST PROOF LINEAR ARMATURE



- Metal Base
- PP Diffuser
- IP40 Protection
- NO-VO LED driver

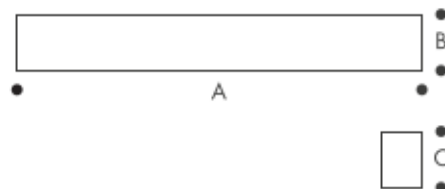


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing material/color
BA042-6500	220-265V	40W	3200	6500	40	1200	72	22	Metal White
BA042-4000	220-265V	40W	3200	4000	40	1200	72	22	Metal White
BA042-3000	220-265V	40W	3200	3000	40	1200	72	22	Metal White

BA042.18 60 CM LED DUST PROOF LINEAR ARMATURE



- Metal Base
- PP Diffuser
- IP40 Protection
- NO-VO LED driver

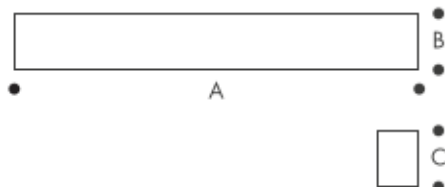


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing material/color
BA042.18-6500	220-265V	18W	1440	6500	40	600	72	22	Metal White
BA042.18-4000	220-265V	18W	1440	4000	40	600	72	22	Metal White
BA042.18-3000	220-265V	18W	1440	3000	40	600	72	22	Metal White



BA036 IP65 WATERPROOF BATTEN LINEAR ARMATURE



PC Housing
PC Diffuser
IP65 Protection
NO-VO LED driver

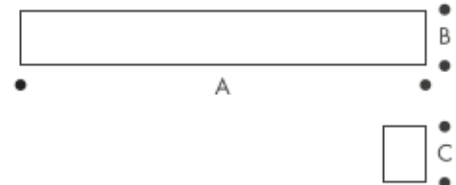


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing material/color
BA036-6500	220-265V	36W	2880	6500	40	1150	70	70	PS / White
BA036-4000	220-265V	36W	2880	4000	40	1150	70	70	PS / White
BA036-3000	220-265V	36W	2880	3000	40	1150	70	70	PS / White

BA036.05 IP65 WATERPROOF BATTEN LINEAR ARMATURE



PC Housing
PC Diffuser
IP65 Protection
NO-VO LED driver

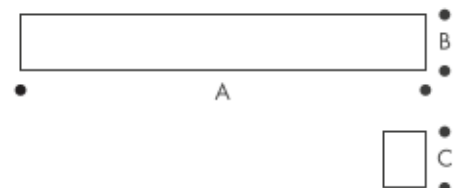


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing material/color
BA036.05-6500	220-265V	36W	2880	6500	40	1225	65	50	PS / White
BA036.05-4000	220-265V	36W	2880	4000	40	1225	65	50	PS / White
BA036.05-3000	220-265V	36W	2880	3000	40	1225	65	50	PS / White



BA036.03 IP65 WATERPROOF BATTEN LINEAR ARMATURE



PC Housing
PC Diffuser
IP65 Protection
NO-VO LED driver

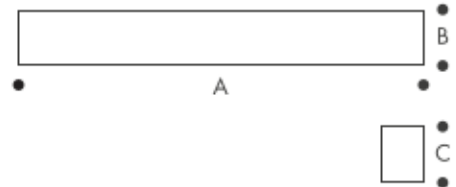


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing material/color
BA036.03-6500	220-265V	36W	2880	6500	40	1215	60	50	PS / White
BA036.03-4000	220-265V	36W	2880	4000	40	1215	60	50	PS / White
BA036.03-3000	220-265V	36W	2880	3000	40	1215	60	50	PS / White

BA036.07 60CM IIP65 WATERPROOF BATTEN LINEAR ARMATURE



PC Housing
PC Diffuser
IP65 Protection
NO-VO LED driver

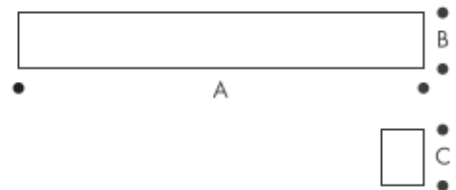


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing material/color
BA036.07-6500	220-265V	36W	2880	6500	40	625	65	50	PS / White
BA036.07-4000	220-265V	36W	2880	4000	40	625	65	50	PS / White
BA036.07-3000	220-265V	36W	2880	3000	40	625	65	50	PS / White



BA036.08 IP65 WATERPROOF FIXTURE


NO-VO LED driver
IP65 Protection
PC Diffuser
PC Housing

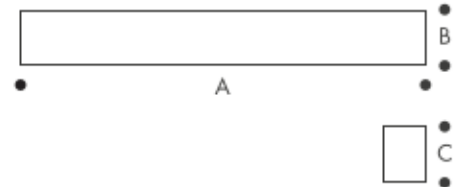

Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing material/color
BA036.08-6500	220-265V	36W	2880	6500	65	1200	150	80	PS / Grey
BA036.08-4000	220-265V	36W	2880	4000	65	1200	150	80	PS / Grey
BA036.08-3000	220-265V	36W	2880	3000	65	1200	150	80	PS / Grey

BA036.09 IP65 WATERPROOF FIXTURE

ENEC Certificated LED driver
IP65 Protection
PC Diffuser
PC Housing

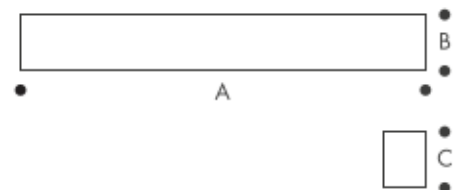


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing material/color
BA036.09-6500	220-265V	36W	2880	6500	65	1200	150	80	PS / Grey
BA036.09-4000	220-265V	36W	2880	4000	65	1200	150	80	PS / Grey
BA036.09-3000	220-265V	36W	2880	3000	65	1200	150	80	PS / Grey



BA036.10 IP65 WATERPROOF FIXTURE


NO-VO LED driver
IP65 Protection
PC Diffuser
PC Housing

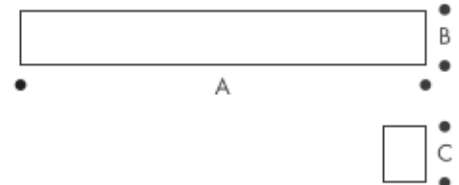

Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing material/color
BA036.10-6500	220-265V	54W	4320	6500	65	1200	150	80	PS / Grey
BA036.10-4000	220-265V	54W	4320	4000	65	1200	150	80	PS / Grey
BA036.10-3000	220-265V	54W	4320	3000	65	1200	150	80	PS / Grey

BA036.11 IP65 WATERPROOF FIXTURE

ENEC Certificated LED driver
IP65 Protection
PC Diffuser
PC Housing

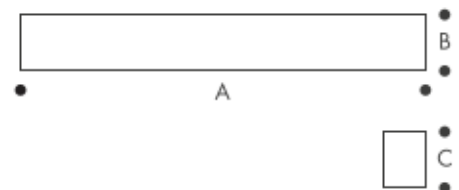


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing material/color
BA036.11-6500	220-265V	72W	5760	6500	65	1200	150	80	PS / Grey
BA036.11-4000	220-265V	72W	5760	4000	65	1200	150	80	PS / Grey
BA036.11-3000	220-265V	72W	5760	3000	65	1200	150	80	PS / Grey



ETJ040 IP65 INDUSTRIAL WATERPROOF FIXTURE


NO-VO LED driver
IP65 Protection
PC Diffuser
PC Housing

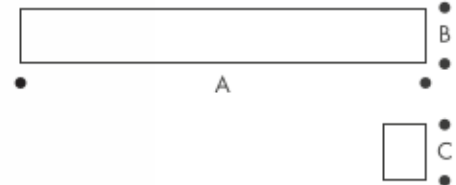

Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing material/color
ETJ040-6500	220-265V	36W	2880	6500	65	1265	85	85	PS / Grey
ETJ040-4000	220-265V	36W	2880	4000	65	1265	85	85	PS / Grey
ETJ040-3000	220-265V	36W	2880	3000	65	1265	85	85*	PS / Grey

ETJ040.01 IP65 INDUSTRIAL WATERPROOF FIXTURE

ENEC Certificated LED driver
IP65 Protection
PC Diffuser
PC Housing

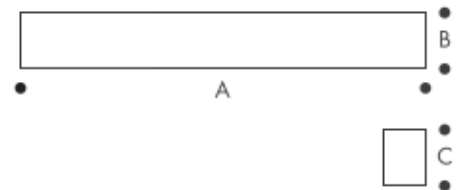

Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing material/color
ETJ040.01-6500	220-265V	36W	2880	6500	65	1265	85	85	PS / Grey
ETJ040.01-4000	220-265V	36W	2880	4000	65	1265	85	85	PS / Grey
ETJ040.01-3000	220-265V	36W	2880	3000	65	1265	85	85*	PS / Grey

	220-265V 50Hz	IP65	50.000h	CRI 80	PC OPAL DIFFUSER	PC BASE	SURFACE MOUNT				
--	------------------	------	---------	--------	------------------------	------------	------------------	--	--	--	--



T20 18W LED T-BULB

Kolli ölçüsü



40 Adet

470 x 460 x 195



Code	V	W	Lumen	Kelvin	IP	Bulb Socket Type	Body Size
T20-6500	220-265V	18W ± %10	1465	6500	23	E27	T80
T20-4000	220-265V	18W ± %10	1465	4000	23	E27	T80
T20-3000	220-265V	18W ± %10	1465	3000	23	E27	T80

T30 28W LED T-BULB

Kolli ölçüsü



40 Adet

470 x 460 x 195



Code	V	W	Lumen	Kelvin	IP	Bulb Socket Type	Body Size
T30-6500	220-265V	28W ± %10	2098	6500	23	E27	T100
T30-4000	220-265V	28W ± %10	2098	4000	23	E27	T100
T30-3000	220-265V	28W ± %10	2098	3000	23	E27	T100

T40 40W LED T-BULB

Kolli ölçü



40 Adet

470 x 40 x 195



Code	V	W	Lumen	Kelvin	IP	Bulb Socket Type	Body Size
T40-6500	220-265V	40W ± %10	3668	6500	23	E27	T115
T40-4000	220-265V	40W ± %10	3668	4000	23	E27	T115
T40-3000	220-265V	40W ± %10	3668	3000	23	E27	T115

T50 50W LED T-BULB

Kolli ölçü



40 Adet

470 x 40 x 195



Code	V	W	Lumen	Kelvin	IP	Bulb Socket Type	Body Size
T50-6500	220-265V	50W ± %10	4523	6500	23	E27	T140
T50-4000	220-265V	50W ± %10	4523	4000	23	E27	T140
T50-3000	220-265V	50W ± %10	4523	3000	23	E27	T140

T100 100W LED T-BULB

Kelvin



40 Adet

470 x 460 x 195



Code	V	W	Lumen	Kelvin	IP	Bulb Socket Type	Body Size
T100-6500	220-265V	100W	9000	6500	23	E27	T150
T100-4000	220-265V	100W	9000	4000	23	E27	T150
T100-3000	220-265V	100W	9000	3000	23	E27	T150

T150 50W LED T-BULB

Kelvin



40 Adet

470 x 460 x 195



Code	V	W	Lumen	Kelvin	IP	Bulb Socket Type	Body Size
T150-6500	220-265V	150W	13500	6500	23	E27	T170
T150-4000	220-265V	150W	13500	4000	23	E27	T170
T150-3000	220-265V	510W	13500	3000	23	E27	T170

A006 6W LED BULB



Code	V	W	Lumen	Kelvin	IP	Bulb Socket Type	Body Size
A006-6500	220-265V	6W	480	6500	23	E27	A60
A006-4000	220-265V	6W	480	4000	23	E27	A60
A006-3000	220-265V	6W	480	3000	23	E27	A60

A008 8,5W LED BULB



Code	V	W	Lumen	Kelvin	IP	Bulb Socket Type	Body Size
A008-6500	220-265V	8W	550	6500	23	E27	A65
A008-4000	220-265V	8W	550	4000	23	E27	A65
A008-3000	220-265V	8W	550	3000	23	E27	A65

A009 9W LED BULB



Code	V	W	Lumen	Kelvin	IP	Bulb Socket Type	Body Size
A009-6500	220-265V	9W	810	6500	23	E27	A65
A009-4000	220-265V	9W	810	4000	23	E27	A65
A009-3000	220-265V	9W	810	3000	23	E27	A65

A010 10W+1W LED BULB



Code	V	W	Lumen	Kelvin	IP	Bulb Socket Type	Body Size
A009-6500	220-265V	9W	810	6500	23	E27	A60
A009-4000	220-265V	9W	810	4000	23	E27	A60
A009-3000	220-265V	9W	810	3000	23	E27	A60

A012 12W LED BULB



Code	V	W	Lumen	Kelvin	IP	Bulb Socket Type	Body Size
A012-6500	220-265V	12W	1080	6500	23	E27	A65
A012-4000	220-265V	12W	1080	4000	23	E27	A65
A012-3000	220-265V	12W	1080	3000	23	E27	A65

A015 15W LED BULB



Code	V	W	Lumen	Kelvin	IP	Bulb Socket Type	Body Size
A015-6500	220-265V	15W	1350	6500	23	E27	A65
A015-4000	220-265V	15W	1350	4000	23	E27	A65
A015-3000	220-265V	15W	1350	3000	23	E27	A65

A007.01 7W LED BULB



Code	V	W	Lumen	Kelvin	IP	Bulb Socket Type	Body Size
A007.01-6500	220-265V	7W	630	6500	23	E27	A60
A007.01-4000	220-265V	7W	630	4000	23	E27	A60
A007.01-3000	220-265V	7W	630	3000	23	E27	A60

A012 12W LED BULB




Code	V	W	Lumen	Kelvin	IP	Bulb Socket Type	Body Size
A012-6500	220-265V	12W	1080	6500	23	E27	A65
A012-4000	220-265V	12W	1080	4000	23	E27	A65
A012-3000	220-265V	12W	1080	3000	23	E27	A65

A015 15W LED BULB




Code	V	W	Lumen	Kelvin	IP	Bulb Socket Type	Body Size
A015-6500	220-265V	15W	1350	6500	23	E27	A65
A015-4000	220-265V	15W	1350	4000	23	E27	A65
A015-3000	220-265V	15W	1350	3000	23	E27	A65

PRJ050 50W LED FLOOD LIGHT

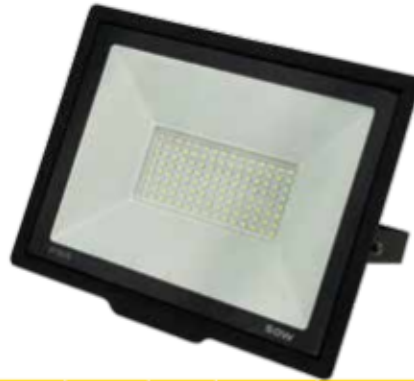


- Aluminium body
- Tempered Glass

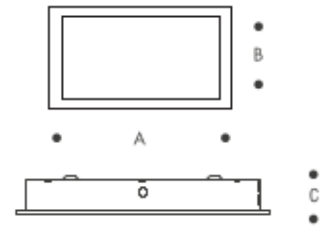


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing / color
PRJ050-6500	220-265V	50W	4000	6500	65	220	143	27	Black

PRJ100 100W LED FLOOD LIGHT

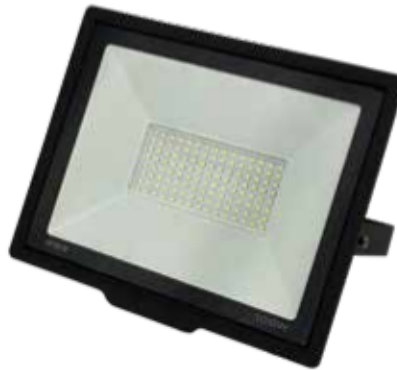


- Aluminium body
- Tempered Glass




Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing / color
PRJ100-6500	220-265V	100W	8000	6500	65	160	180	30	Black

PRJ150 150W LED FLOOD LIGHT

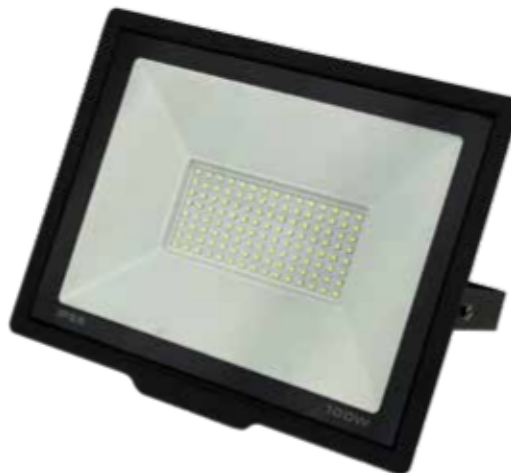


- Aluminium body
- Tempered Glass




Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing / color
PRJ150-6500	220-265V	150W	12000	6500	65	275	190	38	Black

PRJ200 200W LED FLOOD LIGHT

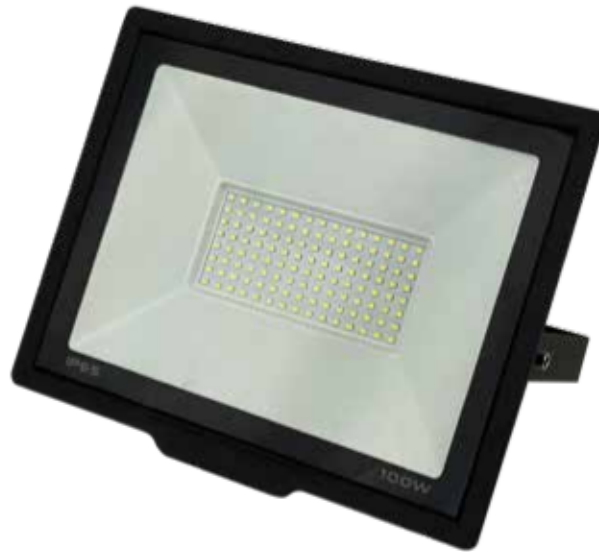


- Aluminium body
- Tempered Glass

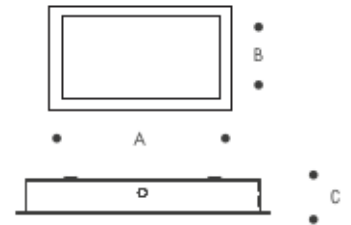


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing / color
PRJ200-6500	220-265V	200W	16000	6500	65	340	240	48	Black

PRJ200 200W LED FLOOD LIGHT

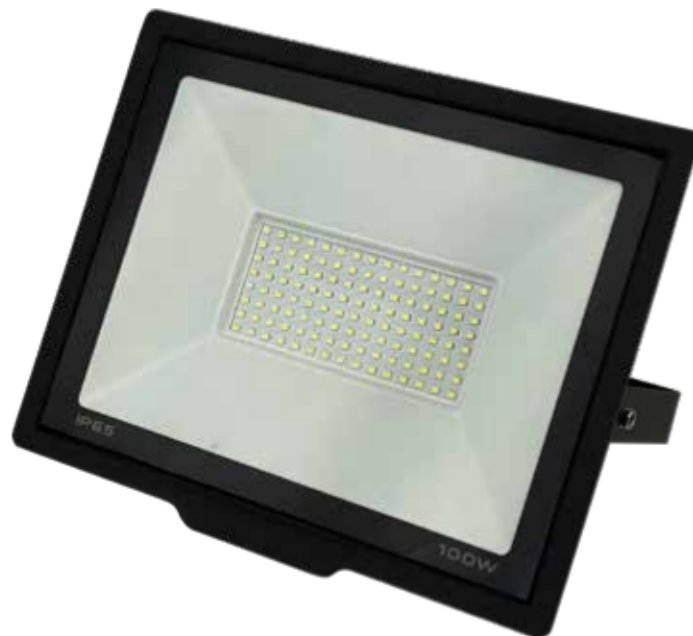

- Aluminium body
- Tempered Glass

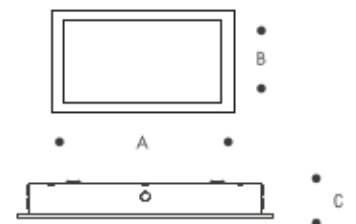


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing / color
PRJ200-6500	220-265V	200W	16000	6500	65	340	240	48	Black

YT080.01 - 80W LED HIGH BAY LIGHTING FIXTURE



- Aluminium Body
- Tempered Glass
- OSRAM LED

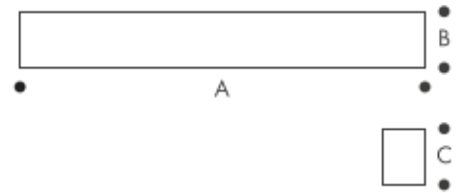


Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing material/color
YT080.001-6500	220-265V	80W	9200	6500	40	1200	150	80	Alüminiyum/Grey
YT080.001-4000	220-265V	80W	9200	4000	40	1200	150	80	Alüminiyum/Grey
YT080.001-3000	220-265V	80W	9200	3000	40	1200	150	80	Alüminiyum/Grey

YT080 - 80W LED HIGH BAY LIGHTING FIXTURE




- Aluminium Body
- Tempered Glass
- OSRAM LED
- 2x OSRAM Driver

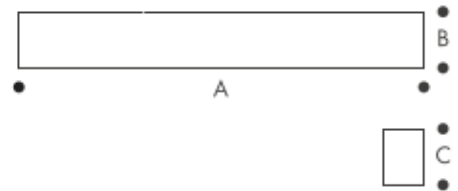

Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing material/color
YT080-6500	220-265V	80W	9200	6500	40	1200	150	80	Alüminiyum/Grey
YT080-4000	220-265V	80W	9200	4000	40	1200	150	80	Alüminiyum/Grey
YT080-3000	220-265V	80W	9200	3000	40	1200	150	80	Alüminiyum/Grey

YT120 - 120W LED HIGH BAY LIGHTING FIXTURE


- Aluminium Body
- Tempered Glass
- OSRAM LED

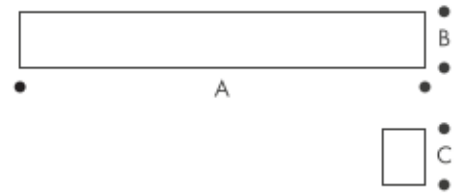

Code	V	W	Lumen	Kelvin	IP	A (mm)	B (mm)	C (mm)	Housing material/color
YT120-6500	220-265V	120W	13800	6500	40	1200	150	80	Aluminium
YT120-4000	220-265V	120W	13800	4000	40	1200	150	80	Aluminium
YT120-3000	220-265V	120W	13800	3000	40	1200	150	80	Aluminium

YT160 - 160W LED HIGH BAY LIGHTING FIXTURE

- Aluminium Body
- Tempered Glass
- OSRAM LED
- 2x OSRAM Driver

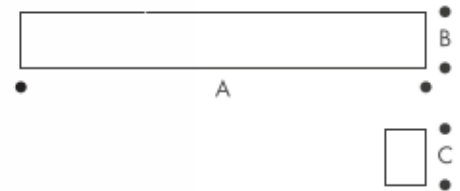


KOD	V	W	Lümen	Kelvin	IP	Güç Ünitesi	A (mm)	B (mm)	C (mm)	Housing material/color
YT160-6500	220-265V	160W	18400	6500	40	VAR	1200	220	80	Aluminium
YT160-4000	220-265V	160W	18400	4000	40	VAR	1200	220	80	Aluminium
YT160-3000	220-265V	160W	18400	3000	40	VAR	1200	220	80	Aluminium

3W SURFACE MOUNT WALLWASHER




Code	V	W	Lumen	CCT
NVW12CM3WEL3K	220-265V	3W	240	6500
NVW12CM3WEL4K	220-265V	3W	240	4000
NVW12CM3WEL6K	220-265V	3W	240	3000
NVW12CM3WELA	220-265V	3W	240	AMBER
NVW12CM3WELK	220-265V	3W	240	RED
NVW12CM3WELY	220-265V	3W	240	GREEN
NVW12CM3WELM	220-265V	3W	240	BLUE
NVW12CM3WELP	220-265V	3W	240	PINK
NVW12CM3WELT	220-265V	3W	240	TURQUOISE

6W SURFACE MOUNT WALLWASHER

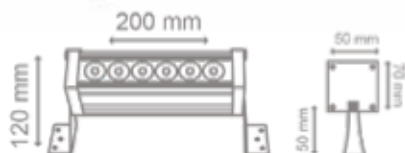

Code	V	W	Lumen	CCT
NVW20CM6WEL3K	220-265V	6W	480	6500
NVW20CM6WEL4K	220-265V	6W	480	4000
NVW20CM6WEL6K	220-265V	6W	480	3000
NVW20CM6WELA	220-265V	6W	480	AMBER
NVW20CM6WELK	220-265V	6W	480	RED
NVW20CM6WELY	220-265V	6W	480	GREEN
NVW20CM6WELM	220-265V	6W	480	BLUE
NVW20CM6WELP	220-265V	6W	480	PINK
NVW20CM6WELT	220-265V	6W	480	TURQUOISE
NVW20CM6WELRGB	220-265V	6W	480	RGB

9W SURFACE MOUNT WALLWASHER

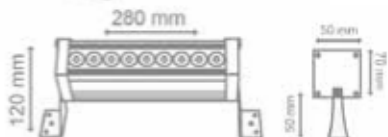

Code	V	W	Lumen	CCT
NVW28CM9WEL3K	220-265V	9W	720	6500
NVW28CM9WEL4K	220-265V	9W	720	4000
NVW28CM9WEL6K	220-265V	9W	720	3000
NVW28CM9WELA	220-265V	9W	720	AMBER
NVW28CM9WELK	220-265V	9W	720	RED
NVW28CM9WELY	220-265V	9W	720	GREEN
NVW28CM9WELM	220-265V	9W	720	BLUE
NVW28CM9WELP	220-265V	9W	720	PINK
NVW28CM9WELT	220-265V	9W	720	TURQUOISE
NVW28CM9WELRGB	220-265V	6W	720	RGB

12W SURFACE MOUNT WALLWASHER




Code	V	W	Lumen	CCT
NW35CM12WEL3K	220-265V	12W	13800	6500
NW35CM12WEL4K	220-265V	12W	13800	4000
NW35CM12WEL6K	220-265V	12W	13800	3000
NW35CM12WELA	220-265V	12W	13800	AMBER
NW35CM12WELK	220-265V	12W	13800	RED
NW35CM12WELY	220-265V	12W	13800	GREEN
NW35CM12WELM	220-265V	12W	13800	BLUE
NW35CM12WELP	220-265V	12W	13800	PINK
NW12CM12WELT	220-265V	12W	13800	TURQUOISE

18W SURFACE MOUNT WALLWASHER



Code	V	W	Lumen	CCT
NW50CM18WEL3K	220-265V	18W	13800	6500
NW50CM18WEL4K	220-265V	18W	13800	4000
NW50CM18WEL6K	220-265V	18W	13800	3000
NW50CM18WELA	220-265V	18W	13800	AMBER
NW50CM18WELK	220-265V	18W	13800	RED
NW50CM18WELY	220-265V	18W	13800	GREEN
NW50CM18WELM	220-265V	18W	13800	BLUE
NW50CM18WELP	220-265V	18W	13800	PINK
NW50CM18WELT	220-265V	18W	13800	TURQUOISE
NW50CM18WELRGB	220-265V	18W	13800	RGB

24W SURFACE MOUNT WALLWASHER

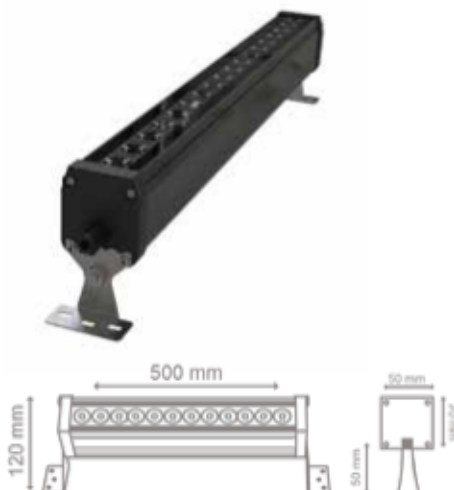

Code	V	W	Lumen	CCT
NW67CM24WEL3K	220-265V	24W	13800	6500
NW67CM24WEL4K	220-265V	24W	13800	4000
NW67CM24WEL6K	220-265V	24W	13800	3000
NW67CM24WELA	220-265V	24W	13800	AMBER
NW67CM24WELK	220-265V	24W	13800	RED
NW67CM24WELY	220-265V	24W	13800	GREEN
NW67CM24WELM	220-265V	24W	13800	BLUE
NW67CM24WELP	220-265V	24W	13800	PINK
NW67CM24WELT	220-265V	24W	13800	TURQUOISE

36W SURFACE MOUNT WALLWASHER



Code	V	W	Lumen	CCT
NW98CM36W3K	220-265V	36W	2880	6500
NW98CM36W4K	220-265V	36W	2880	4000
NW98CM36W6K	220-265V	36W	2880	3000
NW98CM36WA	220-265V	36W	2880	AMBER
NW98CM36WK	220-265V	36W	2880	RED
NW98CM36WY	220-265V	36W	2880	GREEN
NW98CM36WM	220-265V	36W	2880	BLUE
NW98CM36WP	220-265V	36W	2880	PINK
NW98CM36WT	220-265V	36W	2880	TURQUOISE
NW98CM36WRGB	220-265V	36W	2880	RGB

42W SURFACE MOUNT WALLWASHER




Code	V	W	Lumen	CCT
NW113CM42W3K	220-265V	42W	3360	6500
NW113CM42W4K	220-265V	42W	3360	4000
NW113CM42W6K	220-265V	42W	3360	3000
NW113CM42WA	220-265V	42W	3360	AMBER
NW113CM42WEK	220-265V	42W	3360	RED
NW113CM42WY	220-265V	42W	3360	GREEN
NW113CM42WM	220-265V	42W	3360	BLUE
NW113CM42WP	220-265V	42W	3360	PINK
NW113CM42WT	220-265V	42W	3360	TURQUOISE

54W SURFACE MOUNT WALLWASHER




Code	V	W	Lumen	CCT
NW145CM54W3K	220-265V	54W	4320	6500
NW145CM54W4K	220-265V	54W	4320	4000
NW145CM54W6K	220-265V	54W	4320	3000
NW145CM54WA	220-265V	54W	4320	AMBER
NW145CM54WEK	220-265V	54W	4320	RED
NW145CM54WY	220-265V	54W	4320	GREEN
NW145CM54WM	220-265V	54W	4320	BLUE
NW145CM54WP	220-265V	54W	4320	PINK
NW145CM54WT	220-265V	54W	4320	TURQUOISE

3W RECESSED MOUNT WALLWASHER

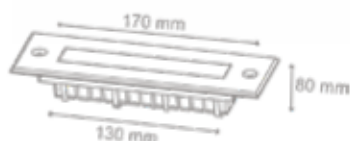


Code	V	W	Lumen	CCT
NVWSA12CM3W 3K	220-265V	3W	240	6500
NVWSA12CM3W 4K	220-265V	3W	240	4000
NVWSA12CM3W 6K	220-265V	3W	240	3000
NVWSA12CM3W A	220-265V	3W	240	AMBER
NVWSA12CM3W K	220-265V	3W	240	RED
NVWSA12CM3W Y	220-265V	3W	240	GREEN
NVWSA12CM3W M	220-265V	3W	240	BLUE
NVWSA12CM3W P	220-265V	3W	240	PINK
NVWSA12CM3W T	220-265V	3W	240	TURQUOISE

6W RECESSED MOUNT WALLWASHER

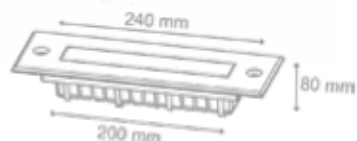

Code	V	W	Lumen	CCT
NVWSA22.5CM6W 3K	220-265V	6W	480	6500
NVWSA22.5CM6W 4K	220-265V	6W	480	4000
NVWSA22.5CM6W 6K	220-265V	6W	480	3000
NVWSA22.5CM6W A	220-265V	6W	480	AMBER
NVWSA22.5CM6W K	220-265V	6W	480	RED
NVWSA22.5CM6W Y	220-265V	6W	480	GREEN
NVWSA22.5CM6W M	220-265V	6W	480	BLUE
NVWSA22.5CM6W P	220-265V	6W	480	PINK
NVWSA22.5CM6W T	220-265V	6W	480	TURQUOISE

9W RECESSED MOUNT WALLWASHER

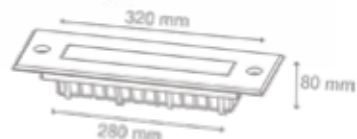

Code	V	W	Lumen	CCT
NVWSA30CM9W 3K	220-265V	9W	720	6500
NVWSA30CM9W 4K	220-265V	9W	720	4000
NVWSA30CM9W 6K	220-265V	9W	720	3000
NVWSA30CM9W A	220-265V	9W	720	AMBER
NVWSA30CM9W K	220-265V	9W	720	RED
NVWSA30CM9W Y	220-265V	9W	720	GREEN
NVWSA30M9W M	220-265V	9W	720	BLUE
NVWSA30CM9W P	220-265V	9W	720	PINK
NVWSA30CM9W T	220-265V	9W	720	TURQUOISE

12W RECESSED MOUNT WALLWASHER



Code	V	W	Lumen	CCT
NWSA39.5CM12W 3K	220-265V	12W	960	6500
NWSA39.5CM12W 4K	220-265V	12W	960	4000
NWSA39.5CM12W 6K	220-265V	12W	960	3000
NWSA39.5M12W A	220-265V	12W	960	AMBER
NWSA39.5CM12W K	220-265V	12W	960	RED
NWSA39.5CM12W Y	220-265V	12W	960	GREEN
NWSA39.5M12W M	220-265V	12W	960	BLUE
NWSA39.5CM12W P	220-265V	12W	960	PINK
NWSA39.5CM12W T	220-265V	12W	960	TURQUOISE

18W RECESSED MOUNT WALLWASHER



Code	V	W	Lumen	CCT
NWSA55CM18W 3K	220-265V	18W	1440	6500
NWSA55CM18W 4K	220-265V	18W	1440	4000
NWSA55CM18W 6K	220-265V	18W	1440	3000
NWSA55M18W A	220-265V	18W	1440	AMBER
NWSA55CM18W K	220-265V	18W	1440	RED
NWSA55CM18W Y	220-265V	18W	1440	GREEN
NWSA55M18W M	220-265V	18W	1440	BLUE
NWSA55.5CM18W P	220-265V	18W	1440	PINK
NWSA55.5CM18W T	220-265V	18W	1440	TURQUOISE

24W RECESSED MOUNT WALLWASHER



Code	V	W	Lumen	CCT
NWSA71CM24W 3K	220-265V	24W	1920	6500
NWSA71CM24W 4K	220-265V	24W	1920	4000
NWSA71CM24W 6K	220-265V	24W	1920	3000
NWSA71M24W A	220-265V	24W	1920	AMBER
NWSA71CM24W K	220-265V	24W	1920	RED
NWSA71CM24W Y	220-265V	24W	1920	GREEN
NWSA71M24W M	220-265V	24W	1920	BLUE
NWSA71CM24W P	220-265V	24W	1920	PINK
NWSA71CM24W T	220-265V	24W	1920	TURQUOISE

36W RECESSED MOUNT WALLWASHER



Code	V	W	Lumen	CCT
NWSA103CM36W 3K	220-265V	36W	2880	6500
NWSA103CM36W 4K	220-265V	36W	2880	4000
NWSA103CM36W 6K	220-265V	36W	2880	3000
NWSA103M36W A	220-265V	36W	2880	AMBER
NWSA103CM36W K	220-265V	36W	2880	RED
NWSA103CM36W Y	220-265V	36W	2880	GREEN
NWSA103M36W M	220-265V	36W	2880	BLUE
NWSA103CM36W P	220-265V	36W	2880	PINK
NWSA103CM36W T	220-265V	36W	2880	TURQUOISE

NVL5075 - LINEAR 90 LED


OSRAM SAMSUNG PHILIPS



Code	V	W	Lumen	CCT	IP	Lenght mm
NVL5075 90 60	220-265V	18W	1440	650 0K-4000K-300 0K	20	600
NVL5075 90 80	220-265V	25W	2000	650 0K-4000K-300 0K	20	800
NVL5075 90 100	220-265V	35W	2800	650 0K-4000K-300 0K	20	1000
NVL5075 90 120	220-265V	44W	3520	650 0K-4000K-300 0K	20	1200
NVL5075 90 150	220-265V	55W	4400	650 0K-4000K-300 0K	20	1500
NVL5075 90 180	220-265V	65W	5200	650 0K-4000K-300 0K	20	1800
NVL5075 90 200	220-265V	70W	5600	650 0K-4000K-300 0K	20	2000
NVL5075 90 250	220-265V	90W	7200	650 0K-4000K-300 0K	20	1500
NVL5075 90 300	220-265V	105W	8400	650 0K-4000K-300 0K	20	3000

NVL6080T - LINEAR 90 LED


OSRAM SAMSUNG PHILIPS



Code	V	W	Lumen	CCT	IP	Lenght mm
NVL6080 T 90 60	220-265V	18W	1440	650 0K-4000K-300 0K	20	600
NVL6080 T 90 80	220-265V	25W	2000	650 0K-4000K-300 0K	20	800
NVL6080 T 90 100	220-265V	35W	2800	650 0K-4000K-300 0K	20	1000
NVL6080 T 90 120	220-265V	44W	3520	650 0K-4000K-300 0K	20	1200
NVL6080 T 90 150	220-265V	55W	4400	650 0K-4000K-300 0K	20	1500
NVL6080 T 90 180	220-265V	65W	5200	650 0K-4000K-300 0K	20	1800
NVL6080 T 90 200	220-265V	70W	5600	650 0K-4000K-300 0K	20	2000
NVL6080 T 90 250	220-265V	90W	7200	650 0K-4000K-300 0K	20	1500
NVL6080 T 90 300	220-265V	105W	8400	650 0K-4000K-300 0K	20	3000

NVL6080 - LINEAR ÇİFT RENK 90 LED


OSRAM SAMSUNG PHILIPS



Code	V	W	Lumen	CCT	IP	Lenght mm
NVL6080 C 90 60	220-265V	18W	1440	650 0K-4000K-300 0K	20	600
NVL6080 C 90 80	220-265V	25W	2000	650 0K-4000K-300 0K	20	800
NVL6080 C 90 100	220-265V	35W	2800	650 0K-4000K-300 0K	20	1000
NVL6080 C 90 120	220-265V	44W	3520	650 0K-4000K-300 0K	20	1200
NVL6080 C 90 150	220-265V	55W	4400	650 0K-4000K-300 0K	20	1500
NVL6080 C 90 180	220-265V	65W	5200	650 0K-4000K-300 0K	20	1800
NVL6080 C 90 200	220-265V	70W	5600	650 0K-4000K-300 0K	20	2000
NVL6080 C 90 250	220-265V	90W	7200	650 0K-4000K-300 0K	20	1500
NVL6080 C 90 300	220-265V	105W	8400	650 0K-4000K-300 0K	20	3000

NVL3441 - LINEAR 90 LED FIXTURE


OSRAM SAMSUNG PHILIPS



Code	V	W	Lumen	CCT	IP	Lenght mm
NVL3441 90 60	220-265V	18W	1440	6500K-4000K-3000K	20	600
NVL3441 T90 80	220-265V	25W	2000	6500K-4000K-3000K	20	800
NVL3441 T 90 100	220-265V	35W	2800	6500K-4000K-3000K	20	1000
NVL3441 T 90 120	220-265V	44W	3520	6500K-4000K-3000K	20	1200
NVL3441 T90 150	220-265V	55W	4400	6500K-4000K-3000K	20	1500
NVL3441 T 90 180	220-265V	65W	5200	6500K-4000K-3000K	20	1800
NVL3441 T 90 200	220-265V	70W	5600	6500K-4000K-3000K	20	2000
NVL3441 T 90 250	220-265V	90W	7200	6500K-4000K-3000K	20	1500
NVL3441 T 90 300	220-265V	105W	8400	6500K-4000K-3000K	20	3000

NVL8590 - LINEAR 90 LED FIXTURE


OSRAM SAMSUNG PHILIPS

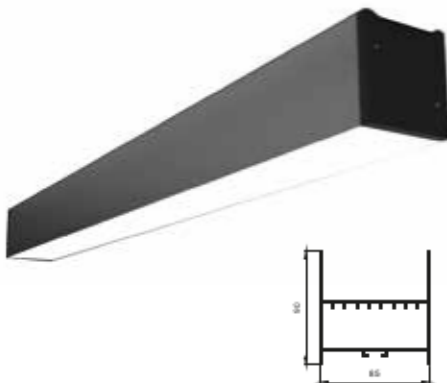

Code	V	W	Lumen	CCT	IP	Lenght mm
NVL8590 90 60	220-265V	36W	13800	6500K-4000K-3000K	20	600
NVL8590 90 80	220-265V	50W	13800	6500K-4000K-3000K	20	800
NVL8590 90 100	220-265V	70W	13800	6500K-4000K-3000K	20	1000
NVL8590 90 120	220-265V	88W	13800	6500K-4000K-3000K	20	1200
NVL8590 90 150	220-265V	110W	13800	6500K-4000K-3000K	20	1500
NVL8590 90 180	220-265V	130W	13800	6500K-4000K-3000K	20	1800
NVL8590 90 200	220-265V	140W	13800	6500K-4000K-3000K	20	2000
NVL8590 90 250	220-265V	180W	210W	6500K-4000K-3000K	20	1500
NVL8590T 90 300	220-265V	210W	13800	6500K-4000K-3000K	20	3000

NVS7545 - LINEAR 90 LED FIXTURE

OSRAM SAMSUNG PHILIPS



Code	V	W	Lumen	CCT	IP	Lenght mm
NVS7545 90 60	220-265V	18W	1440	6500K-4000K-3000K	20	600
NVS7545 90 80	220-265V	25W	2000	6500K-4000K-3000K	20	800
NVS7545 90 100	220-265V	35W	2800	6500K-4000K-3000K	20	1000
NVS7545 90 120	220-265V	44W	3520	6500K-4000K-3000K	20	1200
NVS7545 90 150	220-265V	55W	4400	6500K-4000K-3000K	20	1500
NVS7545 90 180	220-265V	65W	5200	6500K-4000K-3000K	20	1800
NVS7545 90 200	220-265V	70W	5600	6500K-4000K-3000K	20	2000
NVS7545 90 250	220-265V	90W	7200	6500K-4000K-3000K	20	1500
NVS7545 90 300	220-265V	105W	8400	6500K-4000K-3000K	20	3000

NVL5075 - RECTANGLE LINEAR FIXTURE



Code	V	W	Lumen	CCT	IP	Lenght mm
NVL5075 30 60	220-265V	63W	5040	65 00K-4000 K-30 00K	20	300 x 600
NVL5075 30 90	220-265V	84W	6720	65 00K-4000 K-30 00K	20	300 x 900
NVL5075 30 120	220-265V	105W	8400	65 00K-4000 K-30 00K	20	300 x 1200
NVL5075 60 120	220-265V	126W	10080	65 00K-4000 K-30 00K	20	600 x 1200
NVL5075 60 180	220-265V	168W	13440	65 00K-4000 K-30 00K	20	600 x 1800
NVL5075 60 240	220-265V	210W	16800	65 00K-4000 K-30 00K	20	600 x 2400
NVL5075 80 160	220-265V	168W	13440	65 00K-4000 K-30 00K	20	800 x 1600
NVL5075 80 240	220-265V	224W	17920	65 00K-4000 K-30 00K	20	800 x 2400
NVL5075 100 200	220-265V	210W	16800	65 00K-4000 K-30 00K	20	2000 x 2000
NVL5075 120 240	220-265V	252W	20160	65 00K-4000 K-30 00K	20	1200 x 2400

NVL5075 - SQUARE LINEAR FIXTURE



Code	V	W	Lumen	CCT	IP	Lenght mm
NVL5075 40-40	220-265V	55W	4400	65 00K-4000 K-30 00K	20	400 x 400
NVL5075 50-50	220-265V	70W	5600	65 00K-4000 K-30 00K	20	500 x 500
NVL5075 60-60	220-265V	84W	6720	65 00K-4000 K-30 00K	20	600 x 600
NVL5075 70-70	220-265V	98W	7840	65 00K-4000 K-30 00K	20	700 x 700
NVL5075 80-80	220-265V	112W	8960	65 00K-4000 K-30 00K	20	800 x 800
NVL5075 90-90	220-265V	126W	10080	65 00K-4000 K-30 00K	20	900 x 900
NVL5075 100-100	220-265V	140W	11200	65 00K-4000 K-30 00K	20	1000 x 1000
NVL5075 110-110	220-265V	154W	12320	65 00K-4000 K-30 00K	20	1100 x 1100
NVL5075 120-120	220-265V	168W	13440	65 00K-4000 K-30 00K	20	1200 x 1200
NVL5075 150-150	220-265V	210W	16800	65 00K-4000 K-30 00K	20	1500 x 1500
NVL5075 180-180	220-265V	252W	13800	65 00K-4000 K-30 00K	20	1800 x 1800
NVL5075 200-200	220-265V	280W	22400	65 00K-4000 K-30 00K	20	2000 x 2000

NVA-2130 - CIRCULAR LINEAR FIXTURE



Code	V	W	Lumen	CCT	IP	Lenght mm
NVA-2130 40	220-265V	30W	2400	65 00K-4000 K-30 00K	20	Ø 40
NVA-2130 50	220-265V	40W	3200	65 00K-4000 K-30 00K	20	Ø 50
NVA-2130 60	220-265V	50W	4000	65 00K-4000 K-30 00K	20	Ø 60
NVA-2130 70	220-265V	60W	4800	65 00K-4000 K-30 00K	20	Ø 70
NVA-2130 80	220-265V	70W	5600	65 00K-4000 K-30 00K	20	Ø 80
NVA-2130 90	220-265V	80W	6400	65 00K-4000 K-30 00K	20	Ø 90
NVA-2130 100	220-265V	90W	7200	65 00K-4000 K-30 00K	20	Ø 100
NVA-2130 110	220-265V	100W	8000	65 00K-4000 K-30 00K	20	Ø 110
NVA-2130 120	220-265V	110W	8800	65 00K-4000 K-30 00K	20	Ø 120
NVA-2130 130	220-265V	120W	9600	65 00K-4000 K-30 00K	20	Ø 130
NVA-2130 150	220-265V	140W	11200	65 00K-4000 K-30 00K	20	Ø 150
NVA-2130 180	220-265V	170W	13600	65 00K-4000 K-30 00K	20	Ø 180